

07/28/00  
JC813 U.S. PTO

7-31-00

A

LAW OFFICES OF  
ZAGORIN, O'BRIEN & GRAHAM, L.L.P.  
401 WEST 15<sup>TH</sup> STREET, SUITE 870  
AUSTIN, TEXAS 78701  
(512) 347-9030 (PHONE)  
(512) 347-9031 (FAX)

INTELLECTUAL PROPERTY ATTORNEYS

INTERNET: www.IP-Counsel.com

July 28, 2000

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Attorney Docket No.: 1005-0017

JC862 U.S. PTO  
09/627572  
07/28/00

Transmitted herewith for filing is a patent application as follows:

Inventor(s): Haixiang Liang  
Title: CATEGORIZATION OF IMPAIRMENTS AFFECTING A  
COMMUNICATION CHANNEL

Enclosed are:

- 49 Pages of Specification (including Written Description, Claims and Abstract)
- 5 Sheets of Drawings, ☒ Formal / ☐ Informal
- ☒ Declaration for Patent Application (2 pages), ☒ Executed / ☐ Unexecuted
- ☐ Assignment of the Invention (\_\_\_\_ pages, including Cover Sheet)
- ☐ Information Disclosure Statement (\_\_\_\_ pages)  
☐ with Form(s) PTO 1449 (\_\_\_\_ page(s)) and copies of \_\_\_\_ reference(s)
- ☐ Applicant is a Small Entity. Statement filed: Herewith (\_\_\_\_ pages)
- ☒ Other: Check in the amount of \$1,224.00
- ☒ This Transmittal Letter (in duplicate) ☒ Return Postcard


CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Fee
Basic Fee =				690.00
Total Claims	41 - 20	= 21	x \$18.00 =	378.00
Independent Claims	5 - 3	= 2	x \$78.00 =	156.00
Multiple Dependent Claims (if any) - \$260.00 fee				0.00
Other:				0.00
TOTAL FILING FEE				\$1,224.00

- ☒ A check is enclosed for the Total Filing Fee shown above.
- ☐ Please charge the Total Filing Fee shown above to Deposit Account 50-0631.
- ☒ The Commissioner is hereby authorized to charge any additional fees under 37 C.F.R. § 1.16 or 1.17 that may be required during the pendency of this application, and to similarly credit any overpayment, to Deposit Account 50-0631.

EXPRESS MAIL LABEL NO.:  
EL695859178US

Respectfully submitted,

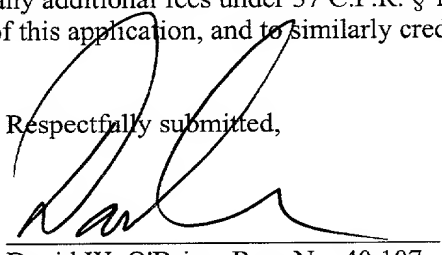

David W. O'Brien, Reg. No. 40,107  
Attorney for Applicant(s)  
(512) 347-9030  
(512) 347-9031 (fax)

"Express Mail" mailing label number:

EL695859178US

## **CATEGORIZATION OF IMPAIRMENTS AFFECTING A COMMUNICATION CHANNEL**

Haixiang Liang

This patent application claims benefit of U.S. Provisional Application No.  
5 60/146,780, filed July 31, 1999.

### **BACKGROUND OF THE INVENTION**

#### **Field of the Invention**

The present invention relates to data communications, and more particularly,  
to digital impairment learning for pulse-code modulation (PCM) modems used in  
10 transmission paths compatible with digital modulation.

#### **Description of the Related Art**

Much of the public switched telecommunications network (PSTN) is  
implemented using digital data transport. Nonetheless, significant portions of the  
PSTN are still based on analog technology. For example, the "local loop" portion of  
15 PSTN that connects a telephone subscriber to a central office (CO) is typically an  
analog loop. Additionally, analog portions may exist at other points along a  
communications path, e.g., as an analog channel in an otherwise digital circuit.

To achieve high downstream data rates in the PSTN, the current generation of  
56 Kbps modems no longer treat the communications path as an analog channel.  
20 Instead, such modems assume that there is only one (1) analog portion in a  
downstream transmission path from a digitally connected server modem to a client  
modem connected to an analog local loop. This configuration is reasonable in areas  
where most Internet Service Providers (ISPs) and business customers are digitally  
connected to the network and allows data signaling rates of up to 56 Kbps in the  
25 downstream transmission path.

Although a variety of similar designs are available, modems conforming to the ITU-T Recommendation V.90 are illustrative. *See generally*, ITU-T Recommendation V.90, *A Digital Modem and Analogue Modem Pair for Use on the Public Switched Telephone Network (PSTN) at Data Signalling Rates of up to 56 000*  
 5 *Bit/S Downstream and up to 33 600 Bit/S Upstream* (09/98) (hereinafter referred to as "Recommendation V.90"), the entirety of which is incorporated by reference herein. Recommendation V.90 defines a method for signaling between a modem connected to an analog loop (the analog modem) and a modem connected to the digital trunk (the digital modem). Modems in accordance with Recommendation V.90 take advantage  
 10 of this particular arrangement to increase the data rate from the digital modem to the analog modem.

Earlier generations of modems, e.g., those conforming to ITU-T Recommendation V.34 and/or earlier standards, suffered from quantization noise introduced in the conversion of analog signals to digital, Pulse Code Modulation  
 15 (PCM) codewords for transmission in digital portions of the PSTN. Modern modems, including modems conforming to Recommendation V.90, avoid the effects of PCM quantization by using a form of amplitude modulation that allows voltage amplitude levels to be chosen from the quantization levels of the PCM coder/decoder (codec) in the CO. Recommendation V.90 matches the quantization levels to potentially  
 20 eliminate quantization noise entirely in a downstream path from a server modem to a line interface. Thus, Recommendation V.90 achieves higher data rates when there are no analog-to-digital conversions between a V.90 digital modem and the PSTN. A digital V.90 modem transmits PCM codewords that are converted to discrete analog voltage levels in the local CO and are sent to the analog V.90 modem via the analog  
 25 local loop. The analog modem's receiver then reconstructs the discrete network PCM codewords from the analog signals received.

There is no specific technique provided in Recommendation V.90 by which the analog client modem is to decide whether PCM signaling can be supported by the downstream channel. Rather, the client modem must make an inference about the  
 30 condition of the channel during the training process. Moreover, part of the modem training procedure, defined in Recommendation V.90, includes estimating the digital impairments present on the telephone channel. Several common sources of digital

impairments are Robbed Bit Signaling (RBS), transcoding (e.g., A-law to  $\mu$ -law conversion), and digital attenuation pad.

Using current techniques, 56 Kbps downstream signaling rates can often be achieved. However, actual signaling rates may be limited by distortion introduced in the digital backbone itself. One source of distortion is Robbed Bit Signaling (RBS). RBS is an in-band signaling technique used in some portions of the PSTN to perform control functions such as conveyance of ring and call progress indications in the telephone network. In short, RBS involves modification by the PSTN of data transmitted. Generally, a least significant bit (LSB) of certain PCM codewords may be used (or usurped) by a portion of the digital backbone. Although usurpation of bits is generally acceptable when codewords carry a voice signal, RBS effectively acts as noise or distortion when codewords carry a data signal. Moreover, RBS limits the information carrying capacity of a communications channel that includes a portion employing it.

Recognizing these limitations, techniques have been developed for detecting, characterizing and mitigating RBS. For example, U.S. Patent 5,875,229 to Eyuboglu et al., proposes detection and characterization of RBS during a "training" phase prior to other training operations such as initialization of equalizer coefficients. Eyuboglu's characterization technique is based on counting LSB values equal to logic zero and logic one in each of 24 intervals of a received training signal. U.S. Patent 5,859,872 to Townshend also proposes a scheme for handling RBS in which RBS is detected during an initial training phase. In Townshend, a decoder first attempts to equalize a received training signal having a known pattern by minimizing the difference between its output and a known pattern under the assumption that no robbing of bits occurred. The decoder then measures the average equalized values at each of six phases and determines for each phase which of 4 bit robbing schemes (including no bit robbing) has been employed. Once the bit robbing that occurred in each phase is determined, the equalization process is rerun, since the first equalization was performed without knowledge of the bit robbing.

Recommendation V.90 specifies a protocol between digital and analog PCM modems, whereby a Digital Impairment Learning (DIL) sequence is supplied to allow

the analog PCM modem to detect digital impairments in a communication path. In this way, the analog PCM modem may define a constellation (or constellations) that tend to avoid or compensate for the discovered impairments. The protocol defined in Recommendation V.90 allows each manufacturer to define a Digital Impairment

5 Learning (DIL) sequence to meet its objectives.

## **SUMMARY OF THE INVENTION**

Accordingly, a class of impairment compensation sequences and related techniques have been developed. In some realizations, impairment compensation sequences are intended to be requested and supplied as a DIL sequence in accordance  
10 with the protocols of Recommendation V.90. However, other similar realizations, e.g., based on proprietary or future protocols, as well as realizations without a formal or generic request/response protocol, are also envisioned and will be appreciated by persons of ordinary skill in the art based on the description herein.

In general, techniques in accordance with the present invention employing  
15 impairment compensation sequences accept the characteristics of each timing phase as presented and need not make *a priori* assumptions about RBS or other digital impairments in the communication channel. Accordingly, the impairment compensation sequences and related techniques are robust to digital impairments, including new digital impairments encountered in the field, that are periodic in N  
20 phases of the impairment compensation sequence as explained in greater detail herein. For example, in the case of RBS impairments, previous approaches have required knowledge of the RBS forms present in the telephone network. In contrast, 24-phase impairment compensation sequences in accordance with some embodiments of the present invention are indifferent to the particular form of RBS present, including  
25 overlaid contributions of various digital portions of a communications path, as long as all RBS is periodic in the 24 phases. Indeed, using complementary techniques described herein, impairment compensation may be achieved without identification of the specific RBS forms affecting a communications path.

Accordingly, realizations of communications apparatus and methods  
30 employing such impairment compensation sequences and/or related techniques generally do not require updated software or hardware if and when new impairments

are encountered in the field or when used in a particular communication networks. For impairments periodic in a predetermined number of phases of a impairment compensation sequence (e.g., RBS-related impairments with periods of 6, 12, or 24 phases of a DIL sequence in accordance with the present invention), new types and/or combinations of impairments may be tolerated and communications facilities employing impairment compensation sequences and/or techniques in accordance with the present invention may conveniently adapt thereto.

In one embodiment in accordance with the present invention, a method of operating a communications device to compensate for one or more potential impairments in a communication channel, each periodic in N timing phases thereof, includes receiving a sequence via the communication channel and estimating symbols thereof, the sequence organized such that corresponding instances of one or more symbols of a predetermined set appear in each of the N phases, grouping the N phases into one or more groups thereof based on correspondence of respective estimates of the corresponding symbol instances, and, for each group, compensating for an aggregate effect of the impairments on the grouped phases without identification of individual impairments active in the particular phases. In one variation, the received sequence includes an impairment compensation sequence transmitted by a remote communications device. In another variation, the communications channel includes at least one portion susceptible to robbed bit signaling (RBS). In still yet another variation, the grouping based on correspondence includes computing distance measures based on the respective estimates and selecting for inclusion in a particular group, those phases for which the computed distance measures are less than a threshold.

In another embodiment in accordance with the present invention, a method of categorizing N phases of a received sequence of amplitude estimates according to impairments present therein suitable for use in a communications system susceptible to one or more potential impairments includes organizing the received amplitude estimates into the N phases, wherein N is selected such that each potential impairment, if present, is periodic therein, and for each of the N phases, comparing one or more sets of amplitude estimates thereof to respective one or more sets of the

amplitude estimates of other phases of the N phases to categorize the N phases into one or more groups according to similarity of the impairments, if any, present therein.

In still another embodiment in accordance with the present invention, a communications device for a communications system susceptible to one or more potential impairments each periodic in an integer number of symbols transmitted across a channel includes a receiver and a digital impairment component. The receiver receives a sequence of symbols transmitted across the channel and produces a sequence of amplitude estimates. The digital impairment component categorizes N phases of the sequence of amplitude estimates according to impairments present therein and includes an organize component and a grouping component. The organize component organizes the received amplitude estimates into the N phases, wherein N is selected such that each potential impairment, if present, is periodic therein. For each of the N phases, the grouping component compares one or more sets of amplitude estimates thereof to a respective one or more sets of the amplitude estimates of other phases of the N phases to categorize the N phases into one or more groups according to similarity of impairments present therein.

In still yet another embodiment in accordance with the present invention, a computer program product includes instructions executable on at least one processor to at least partially implement a communications device. The instructions include a communication subset thereof executable to adapt the communications device to establish communication across a channel susceptible to one or more potential impairments each periodic in an integer number of symbols transmitted across the channel. The instructions are executable cause the communications device to receive a sequence of amplitude estimates, organize the received amplitude estimates into the N phases, wherein N is selected such that each potential impairment, if present, is periodic therein and, for each of the N phases, compare a set of amplitude estimates thereof to a respective one or more sets of the amplitude estimates of other phases of the N phases to categorize the N phases into one or more groups according to similarity of impairments present therein.

In still yet another embodiment in accordance with the present invention, an apparatus includes a receive path coupled to receive sequences susceptible to one or

more impairments periodic in N phase intervals and means for grouping the phase intervals according to apparent aggregate effect of the impairments thereon without identification of individual impairments active in the particular phases.

In some realizations, an impairment compensation sequence in accordance  
5 with the present invention is requested by an analog PCM modem using a DIL  
descriptor and supplied by a digital PCM modem as a DIL sequence all in accordance  
with phase 3 of a start-up sequence for modems that conform to ITU-T  
Recommendation V.90. However, the techniques described herein are also applicable  
to other data communications configurations and equipment. These and other suitable  
10 configurations will be better appreciated by persons of ordinary skill in the art based  
on the specification that follows.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The present invention may be better understood, and its numerous objects,  
features, and advantages made apparent to those skilled in the art by referencing the  
15 accompanying drawings.

**FIG. 1** is a generalized flow diagram illustrating a digital network including a  
public switched telephone network (PSTN) that employs robbed-bit signaling (RBS).

**FIG. 2** illustrates a communications path for server and client modems  
showing a configuration in which RBS is present in a digital channel.

20 **FIG. 3A** is a diagram illustrating phases of a symbol sequence that may be  
transmitted over a communications path in accordance with an embodiment of the  
present invention.

**FIG. 3B** is a diagram illustrating the organization of an illustrative impairment  
compensation sequence in accordance with the present invention as supplied as a DIL  
25 sequence using the DIL descriptor request and DIL segment supply framework of  
Recommendation V.90.



FIG. 4 is a flow diagram illustrating a method for grouping phase intervals according to similarity of aggregate impairments in accordance with an embodiment of the present invention.

FIG. 5 is a flow diagram illustrating a method for assigning constellation  
5 points in accordance with an embodiment of the present invention.

FIG. 6 depicts an exemplary V.90 modem realization in which Digital Impairment Learning (DIL) techniques in accordance with the present invention may be employed.

The use of the same reference symbols in different drawings indicates similar or  
10 identical items.

### **DESCRIPTION OF THE PREFERRED EMBODIMENT(S)**

Although not limited thereto, some aspects of the present invention are described herein in the context of terminology, protocols, standards, facilities, encoding and modulation schemes, communication networks and/or interfaces typical  
15 of the Public Switched Telephone Network (PSTN). In particular, some aspects of the present invention are illustrated in the context of a digital Pulse Code Modulation (PCM) network, Robbed-Bit Signaling (RBS) typically employed in portions of the current PSTN, and modem realizations conforming to ITU-T Recommendation V.90 and related standards. Nonetheless, this context is merely illustrative. Indeed, based  
20 on the description herein, persons of ordinary skill in the art will appreciate realizations in accordance with the present invention suitable for other communication facilities and networks, including point-to-point circuits, private networks and communications channels generally susceptible to digital impairments.

Accordingly, and subject to the foregoing, the following nomenclature is  
25 presented for clarity in the description of certain illustrative embodiments particularly suitable in the context of a PSTN/V.90-oriented implementation framework:

### **Glossary of Terms**

$A_{i,k}$  estimate of the  $i^{\text{th}}$  amplitude at the  $k^{\text{th}}$  timing phase

	$A'_{i,k}$	an averaged version of $A_{i,k}$
	$c$	index used to point to a Uchord
	$\phi$	denotes the empty set
5	$\gamma_i$	$i^{\text{th}}$ subset of $\Sigma$ consisting of all sets $\{\sigma_j\}$ that exhibit the same or similar aggregate impairments (e.g., from one or more RBS forms active in corresponding time indices)
	$\Gamma$	the set, $\{\gamma_0, \gamma_1, \dots, \gamma_{M-1}\}$ , of subsets of $\Sigma$
	$d(\sigma_i, \sigma_j)$	sum of the amplitude differences-squared in the sets $\sigma_i$ and $\sigma_j$ (set difference)
10	DIL	Digital Impairment Learning sequence
	$d_{\min}$	minimum distance parameter
	$H_c$	used to calculate the length of the DIL-segments containing training symbols from $Uchord_c$ .
	$i$	arbitrary integer index
15	$j$	arbitrary integer index
	$k$	arbitrary integer index
	$L_c$	length of one DIL-segment
	$L_{SP}$	length of the sign pattern
	$L_{TP}$	length of the training pattern
20	$\ell$	arbitrary integer index
	$m$	arbitrary integer index
	$M$	the number of elements in $\Gamma$
	$N$	number of DIL-segments
	$r$	arbitrary integer index
25	$REF_c$	reference symbol in the DIL-segment containing training symbols from $Uchord_c$ .
	PCM	Pulse Code Modulation

	$P_{\max}$	maximum power transmitted by digital modem
	$R_i$	reference symbol at time index $i$
	$s_m$	number of elements in (i.e. the size of) the set $\gamma_m$
	$SP$	sign pattern
5	$\sigma'_i$	a representative element of $\gamma_i$
	$\sigma_k$	set of all estimated amplitudes at time index $k$
	$\Sigma$	$\{\sigma_k; k = 0, 1, \dots, 23\}$
	$T_i$	training symbol at time index $i$
	$TP$	training pattern
10	$\theta$	threshold less than which a set difference is defined to be small
	$Ucode$	A universal code used to refer to a symbol value whether encoded as a $\mu$ -law or an A-law PCM code word.
	$Uchord_c$	The $c^{\text{th}}$ subset of $Ucodes$ . $Ucodes$ are grouped into eight $Uchords$ . $Uchord_1$ contains $Ucodes$ 0 to 15;
15		$Uchord_2$ contains $Ucodes$ 16 to 31; ...; and $Uchord_8$ contains $Ucodes$ 112 to 127.
	$x(k)$	denotes equalizer input sample at time index $k$
	$y(k)$	denotes equalizer output sample at time index $k$

### **Digital Impairments (including RBS) in the PSTN**

20 A conventional network is shown in FIG. 1. Network 100 includes a digital network such as public switched telephone network (PSTN) 100 that includes a digital backbone 110. In the configuration shown, data processing equipment 121, such as an internet server or gateway thereto, communicates with a digital adapter 123, such as a digital V.90 modem, during data communications with data processing

25 equipment 122, e.g., a user's computer. Digital adapter 123 transmits a sequence of symbols over digital backbone 110 to line interface 124. Line interface 124 in turn

transmits baseband signals on local loop 126. Local loop 126 typically transmits voice signals or binary data in the form of baseband signals to analog adapter 125.

Analog adapter 125, e.g., an analog V.90 modem, receives the baseband signals and may, in turn, equalize and sample the baseband signal, detect the binary information in the demodulated signal and supply results to data processing equipment 122. A reverse path from analog adapter 125 to digital adapter 123 may be constructed using conventional analog modem signaling techniques, such as, for example, V.34 technology, or other suitable techniques. *See generally*, U.S. Patents 5,875,229 and 5,859,872; *see also* Recommendation V.90 for a description of digital/analog modem pair technology.

Digital backbone 110 typically transmits encoded representations of symbol sequences. In an illustrative realization, symbols are encoded as A-law or  $\mu$ -law pulse code modulation (PCM) codewords, each eight bits in length. Line interface 124 receives the encoded symbols from digital backbone 110 and an A-law or a  $\mu$ -law decoder prepares the symbols for transmission via local loop 126. In a typical realization, line interface 124 produces discrete baseband signals that correspond to inverse quantized symbols that are transmitted to analog adapter 125. Analog adapter 125 receives the baseband signals and obtains the transmitted data through signal processing techniques. Data processing equipment 122, in turn, receives the transmitted data from analog adapter 125.

In an illustrative communications network, digital backbone 110 is part of a PSTN that either employs robbed bit signaling (RBS) or exhibits other digital impairments. Such impairments typically introduce disturbances that have a very small effect on human perception of voice signals, but effectively act as noise or distortion when codewords encode data. Accordingly, digital impairments such as RBS limit the information carrying capacity of a communications channel. Focusing on an illustrative digital impairment, RBS is an in-band signaling technique used in some portions of the PSTN to perform control functions such as conveyance of ring and call progress indications in the telephone network. In portions of the PSTN employing the technique, RBS may result in modification of data transmitted.

Generally, a least significant bit (LSB) of certain PCM codewords may be used (or usurped) by a portion of the digital backbone.

**FIG. 2** illustrates a downstream communications path in which RBS is present in a digital channel **216**. Server modem **212**, e.g., a digital V.90 modem, generates a digital signal that forms an input to a decoder **217**, e.g., an A-law or a  $\mu$ -law decoder. At least some portion of digital channel **216** employs RBS, which "steals" certain low order bits of certain transmitted symbols to instead convey call progress or other indications. Persons of ordinary skill in the art will appreciate that individual portions of the digital channel **216** may each employ RBS affecting the same or different transmitted symbols, such that a conveyed sequence of symbols may be affected by multiple, possibly overlapping, RBS-type digital impairments. Decoder **217** converts the digitally encoded signals received from modem **212** via digital channel **216** and supplies a corresponding modulated analog signal via analog channel **218**. Analog channel **218** conveys the modulated analog signal to client modem **219**, e.g., an analog V.90 modem. Accordingly, the received signal may be affected by multiple, possibly overlapping, RBS-type digital impairments.

**FIG. 3A** illustrates a symbol sequence **300** such as that transmitted by digital adapter **123** over digital backbone **110**. Referring to **FIGS. 2** and **3** in combination, some symbols, namely those PCM codewords transmitted in an interval affected by RBS, may be modified by digital channel **216**. Typical sources of RBS tends to affect every sixth PCM codeword and, depending on the form employed, may force least significant bits (LSBs) of affected codewords to logic 1, to logic 0, or to logic 1 in some intervals and logic 0 in others. *See generally*, U.S. Patents 5,875,229 and 5,859,872 for a discussion of RBS forms employed in the digital PSTN. Although a most basic period for RBS is six intervals, it has been observed that RBS, if employed, may exhibit a period of six, twelve or twenty-four. For example, an all-one RBS pattern will exhibit an RBS period of 6 phase intervals and an alternating zero-one pattern will exhibit an RBS period of 12. Other patterns, such as a pattern consisting of repetitions of 0 and an alternating 1/0 (e.g., 01000100...) will exhibit an RBS period of 24. *See generally*, TIA Draft Standard, TR30.3/ 00-05-0xx (DRAFT 15 PN3857), North American Telephone Network Transmission Model for Evaluating

Analog Client and Digitally Connected Server Modems (May 2000) for a description of RBS patterns and related modem test procedures.

Therefore, for illustrative purposes, symbol sequence 300 can be viewed as exhibiting twenty-four timing phases, e.g., phase 1, phase 2, ... phase 24. Of course, symbols transmitted in given phase may be affected by multiple digital impairments, including multiple forms or sources of RBS. For example, in a digital channel including at least two portions, symbols transmitted in intervals corresponding to phase 2 (see FIG. 3A) may be affected by overlapping RBS contributions (or other digital impairment contributions) from each of the portions. Alternatively, RBS contributions (or other digital impairment contributions) may affect different phases. Whatever the overlap and phasing characteristics of the impairments, the resulting effects are guaranteed to be periodic in 24 intervals.

#### **DIL Sequence Framework**

The Digital Impairment Learning (DIL) framework specified by Recommendation V.90 may be employed in some realizations to allow an analog V.90 modem to request (and receive from a digital V.90 modem) an impairment compensation sequence in accordance with the present invention. In such realizations, the impairment compensation sequence can be encoded as a DIL sequence. Accordingly, certain aspects of the present invention may be best understood when described in the context of the DIL descriptor request/ sequence supply protocol specified by Recommendation V.90. Nonetheless, based on the description herein, persons of ordinary skill in the art will appreciate realizations in which (1) an alternative descriptor request/ sequence supply protocol is employed or (2) no descriptor request/ sequence supply protocol is employed. In general, impairment compensation sequences in accordance with the present invention may be requested, supplied, supplied without request, encoded, etc. in accordance with any suitable implementation framework. Subject to the foregoing, and without limitation, a realization particularly appropriate for the DIL framework of Recommendation V.90 is now described.

To facilitate compensation for digital impairments such as RBS, modem designs in accordance with Recommendation V.90, implement a digital impairment

learning protocol that supports a wide variety of implementations techniques (often vendor specific techniques) for ascertaining, compensating and/or avoiding impairments present in a given communications channel. In some embodiments, equalizer and echo cancellation training (or retraining) at an analog V.90 modem may exploit a digital impairment learning (DIL) sequence transmitted by the digital V.90 modem. Typically, the DIL sequence is received and processed by the analog modem to determine the digital impairments present in the connection, for example, the digital PAD value, the RBS pattern, and nonlinear distortion.

In an illustrative realization, an impairment compensation sequence in accordance with the present invention is requested and supplied using the DIL framework of Recommendation V.90. Referring illustratively to **FIG. 2**, during a training phase of operation (e.g., phase 3 of the startup sequence defined by Recommendation V.90), analog client modem **219** requests a particular DIL sequence using a DIL sequence descriptor. The DIL sequence descriptor is sent from analog client modem **219** to digital modem **212**. In response, digital modem **212** supplies a corresponding DIL via digital channel **216**.

The specific requirements of Recommendation V.90 are well known (*see generally*, ITU-T Recommendation V.90, §§ 8.3, 9.3, which are incorporated herein by reference) and suitable implementations in accordance therewith will be appreciated by persons of ordinary skill in the art. However, to summarize operations in the context of **FIG. 2**, analog client modem **219** transmits a sequence requesting that digital modem **212** begin equalizer training. Analog client modem **219** then transmits a training signal, TRN. After training its receiver, digital modem **212** receives a sequence,  $J_a$ , from the analog client modem **219** and subsequently transmits a training signal,  $TRN_{1d}$ , for used by analog client modem **219** in its equalizer and/or echo cancellation training. In an exemplary realization in accordance with Recommendation V.90, the sequence,  $J_a$ , encodes a DIL descriptor. A suitable format for the DIL descriptor appears in ITU-T Recommendation V.90, § 8.3, Table 12, which is incorporated herein by reference. Digital modem **212** and analog client modem **219** subsequently exchange sequences,  $J_d$  and  $J_d'$ , and signals,  $S$  and  $\bar{S}$ , whereupon digital modem **212** transmits a DIL sequence corresponding to the DIL descriptor.

### DIL Sequence and Descriptor Formats

In some realizations in accordance with the present invention, an impairment compensation sequence is supplied as a DIL sequence and specified using parameters of a DIL descriptor supplied (e.g., by analog modem 219) in accordance with Recommendation V.90. In such realizations, the set of suitable impairment compensation sequences is constrained to a subset of all the possible sequences otherwise in accordance with the description and claims herein. In particular, the suitable subset is constrained by the DIL sequence organization specified by Recommendation V.90 and by the limited expressiveness of the DIL descriptor request format specified in Recommendation V.90. Persons of ordinary skill in the art will appreciate nature of these Recommendation V.90-related constraints based on the following description.

According to Recommendation V.90, a DIL sequence consists of  $N$  DIL-segments of length  $L_c$  where:

$$\begin{aligned} 15 \quad & 0 \leq N \leq 255; \\ & 1 \leq c \leq 8; \text{ and} \\ & L_c = (H_c + 1) * 6 \text{ symbols.} \end{aligned}$$

In the DIL scheme of Recommendation V.90,  $N$ , a set of  $N$  training symbols, a set of reference symbols, segment lengths, and a pattern of training and reference symbols (including a sign pattern) are all specified as part of the DIL descriptor.

In particular, each DIL segment in accordance with Recommendation V.90 includes a single training symbol (e.g., a Ucode) from the set specified in the DIL descriptor. Both a segment length and a reference symbol value may be individually specified for the set of Ucodes (and DIL segments) corresponding to a particular Uchord. For example, each  $H_c$  specifies the length of the DIL-segments containing training symbols from the corresponding  $Uchord_c$ . Similarly, each  $REF_c$ , specifies the reference symbol for use in DIL-segments containing training symbols from the corresponding  $Uchord_c$ . A sign pattern ( $SP$ ) and training pattern ( $TP$ ) are used for the entire DIL sequence. The pattern of  $SP$  bits determines the pattern of sign for symbols of the DIL sequence. More particularly, values of 0 and 1 indicate negative



and positive Ucode signs, respectively. Similarly, the pattern of  $TP$  bits determines the pattern of reference and training symbols in the DIL sequence. More particularly, values of 0 and 1 indicate a reference symbol ( $REF_c$ ) and training symbol, respectively. Patterns are restarted at the beginning of each DIL-segment. The

5 lengths of these patterns are:

$$1 \leq L_{SP} \leq 128; \text{ and}$$

$$1 \leq L_{TP} \leq 128.$$

Based on the description herein, DIL-descriptor formats and corresponding DIL sequences will be readily understood by persons of ordinary skill in the art familiar with Recommendation V.90. Accordingly, DIL-descriptors may be used to specify DIL sequence realizations of impairment compensation sequences in accordance with the claims that follow and provide a useful framework for description. Nonetheless, DIL sequence realizations are merely exemplary and impairment compensation sequences in accordance with the present invention need not comport with Recommendation V.90 or with a descriptor request/ sequence supply protocol.

### Impairment Compensation Sequences

In an exemplary embodiment in accordance with the present invention, an impairment compensation sequence may be employed to conform a communications device to at least a subset of impairments that may be present in a communications channel. For example, estimates (e.g., amplitude estimates) corresponding to training symbols (e.g., PCM code words) may be computed and adaptive signal processing structures (such as equalizers, echo cancellers, etc.) may be trained using a received impairment compensation sequence transmitted over the affected communications channel. In addition, symbol sets may be selected based on the characteristics of the received impairment compensation sequence.

In accordance with the present invention, an exemplary DIL-sequence described herein is designed in order to estimate the received amplitudes associated with all possible ucodes that could be transmitted by the remote modem. Further, the received amplitudes are observed at each of 24 possible time phases. The period of 24 is chosen to coincide with all possible periods of RBS sequences that might be

employed on the digital channel. Actual RBS sequences have unknown periods of either 6, 12, or 24, so observing the received amplitudes at 24 distinct time phases subsumes all cases.

In particular realizations in accordance with the present invention,

5 impairments that are periodic in  $N$  phases of a signal conveyed by the communications channel are addressed using impairment compensation sequences wherein at least one instance of each symbol is placed in each of the  $N$  phases thereof. An illustrative periodic impairment is RBS, which, in current communication systems, is periodic in 6, 12 or 24 symbol intervals of the PSTN. Accordingly, in an

10 RBS-oriented embodiment, an impairment compensation sequence preferably presents each symbol that is, or may be, employed in communication via the affected communications channel in each of 24 phases of the impairment compensation sequence. In this way, estimates may be calculated for each symbol in each phase that may be affected by one or more RBS-type impairments. Since actual RBS

15 impairments have periods that are not known a priori, but which must be 6, 12, or 24 symbol intervals, estimating corresponding amplitudes at each of 24 phases subsumes all cases.

In general, an impairment compensation sequence in accordance with the present invention includes  $N$  phases, wherein  $N$  is selected such that each potential

20 impairment, if present, is periodic therein. According to an exemplary embodiment,  $N$  is 24, as in the maximum period for RBS. The impairment sequence is a sequence of symbols organized to place at least one instance of each symbol from a predetermined set of symbols in each time phase to allow detection of the potential impairments, such as RBS or PAD distortion, in each of the  $N$  phases. Another

25 quality of the impairment compensation sequence is that  $N$  is chosen to be a least common multiple of respective periods of each of the potential impairments. Thus, the impairment compensation sequence establishes communication avoiding impairments that have any integer multiple, and is not limited to RBS and PAD-type periodic impairments.

30 Suitable realizations of such impairment compensation sequences are, in general, shaped by the characteristics of receiver signal processing structures and by

limitations of (or constraints imposed by) any descriptor request/ sequence supply protocol employed. For example, in a receiver that employs a particular equalizer design, e.g., a partial response, class five (PRV) equalizer, the organization of a suitable impairment compensation sequence typically allows training individual

5 training symbols to be isolated in equalizer output sequence. Similarly, in a descriptor request/ sequence supply protocol (such as the DIL descriptor request/ sequence supply protocol of Recommendation V.90) wherein a portions (e.g., segments) thereof each present a single training symbol, the organization of a suitable impairment compensation sequence typically presents at least one instance of a first

10 training symbol (typically interspersed with reference symbols), then at least one instance of a second training symbol, then ..., in each of the N phases of the impairment compensation sequence. In general, to improve the quality of estimation of symbols received, the impairment compensation sequence is organized to place at least two instances of each symbol from a predetermined set of symbols in each

15 phase. The two or more instances can then provide an average of received values corresponding to the symbol.

#### Exemplary DIL Sequences

Based on the description and claims herein, persons of ordinary skill in the art will appreciate the general characteristics of impairment compensation sequences in

20 accordance with the present invention in the context of a particular realization thereof. Accordingly, an impairment compensation sequence is now described which is embodied as an exemplary DIL sequence of symbols selected from the set of Ucodes employed in the PSTN, which is suitable for supply in response to a startup sequence in accordance with Recommendation V.90 and its descriptor request/ sequence supply

25 protocol, and which is particularly adapted for amplitude estimation at a communications device (e.g., an analog V.90 modem) implementation employing a PRV or partial-response, class four (PRIV) equalizer. While the exemplary DIL sequence is particularly suited to such a configuration, persons of ordinary skill in art will understand, based on the more general description herein, that the invention is not

30 limited thereto.

Referring to FIG. 3B and Table 1 below, a first portion 351 (104 symbols) of a DIL segment 350 of an exemplary DIL sequence 340 is illustrated. The complete DIL sequence is typically supplied in response to a DIL descriptor (e.g., DIL descriptor 330) that specifies the characteristics of the desired DIL sequence.

- 5 Column 1 of the table indicates a time index  $k$  where a symbol is supplied at each time  $k = \{0, 1, 2, \dots, 104, \dots\}$ , while column 2 identifies each of 24 phases. For each time index, a symbol (e.g., a reference or training symbol) is supplied via a digital transport in which zero or more phases may be affected by zero or more RBS-type impairments. Each such symbol is received as a corresponding amplitude,  $x(k)$ , which
- 10 is supplied as an input to an equalizer of the receiver (e.g., a PRV or PRIV equalizer of a analog V.90 modem implementation). In the table, R represents instances a reference symbol and T represents a training symbol.

*Table 1—DIL-Sequence*

$k$	Phase	$x(k)$	Equalizer Output [ $\alpha y(k)$ ]	
			PR V	PR IV
0	0	R	---	---
1	1	-R	---	---
2	2	T	---	---
3	3	-T	---	---
4	4	-R	T	T
5	5	R	-T	-T
6	6	-T	---	---
7	7	T	---	---
8	8	R	-T	-T
9	9	-R	T	T
10	10	T	---	---
11	11	-T	---	---
12	12	-R	T	T
13	13	R	-T	-T
14	14	-T	---	---
15	15	T	---	---
16	16	R	-T	-T
17	17	-R	T	T
18	18	T	---	---
19	19	-T	---	---
20	20	-R	T	T
21	21	R	-T	-T
22	22	-T	---	---

$k$	Phase	$x(k)$	Equalizer Output [ $\alpha y(k)$ ]	
			PR V	PR IV
23	23	T	---	---
24	0	R	-T	-T
25	1	-R	T	T
26	2	R	---	---
27	3	-R	---	---
28	4	-T	---	---
29	5	T	---	---
30	6	-R	-T	-T
31	7	R	T	T
32	8	T	---	---
33	9	-T	---	---
34	10	R	T	T
35	11	-R	-T	-T
36	12	-T	---	---
37	13	T	---	---
38	14	-R	-T	-T
39	15	R	T	T
40	16	T	---	---
41	17	-T	---	---
42	18	R	T	T
43	19	-R	-T	-T
44	20	-T	---	---
45	21	T	---	---
46	22	-R	-T	-T
47	23	R	T	T
48	0	T	---	---
49	1	-T	---	---
50	2	R	T	T
51	3	-R	-T	-T
52	4	R	---	---
53	5	-R	---	---
54	6	T	---	---
55	7	-T	---	---
56	8	-R	T	T
57	9	R	-T	-T
58	10	-T	---	---
59	11	T	---	---
60	12	R	-T	-T
61	13	-R	T	T
62	14	T	---	---
63	15	-T	---	---
64	16	-R	T	T
65	17	R	-T	-T

$k$	Phase	$x(k)$	Equalizer Output [ $\alpha y(k)$ ]	
			PR V	PR IV
66	18	-T	---	---
67	19	T	---	---
68	20	R	-T	-T
69	21	-R	T	T
70	22	T	---	---
71	23	-T	---	---
72	0	-R	T	T
73	1	R	-T	-T
74	2	-T	---	---
75	3	T	---	---
76	4	R	-T	-T
77	5	-R	T	T
78	6	R	---	---
79	7	-R	---	---
80	8	-T	---	---
81	9	T	---	---
82	10	-R	-T	-T
83	11	R	T	T
84	12	T	---	---
85	13	-T	---	---
86	14	R	T	T
87	15	-R	-T	-T
88	16	-T	---	---
89	17	T	---	---
90	18	-R	-T	-T
91	19	R	T	T
92	20	T	---	---
93	21	-T	---	---
94	22	R	T	T
95	23	-R	-T	-T
96	0	-T	---	---
97	1	T	---	---
98	2	-R	-T	-T
99	3	R	T	T
100	4	T	---	---
101	5	-T	---	---
102	6	R	T	T
103	7	-R	-T	-T
...	...	...	...	...

A first portion of a DIL segment is illustrated in column 3 of the table. In particular, the organization of the first 104 symbols of an exemplary DIL segment is

illustrated as a sequence of training and reference symbols. Corresponding amplitudes,  $x(k)$ , are supplied as an input to an equalizer of the receiver. Column 4 illustrates idealized scaled outputs of a receiver employing a PRV equalizer wherein an output time sequence  $y(k)$  is related to the input time sequence  $x(k)$  by the relationship:

$$y(k) = x(k) - 2x(k-2) + x(k-4).$$

Similarly, column 5 illustrates idealized scaled outputs of a receiver employing a PRIV equalizer wherein an output time sequence  $y(k)$  is related to the input time sequence  $x(k)$  by the relationship:

$$y(k) = x(k) - x(k-2).$$

In each case, interesting outputs, i.e., those that are a function of a single training symbol instance, are listed. Other outputs, indicated as “---” may be ignored. Note that in the case of outputs for the PR IV equalizer, only a single output based on each training symbol are illustrated. Duplicative outputs are ignored and the illustrated output is selected for correspondence with PRV outputs although other selections could also be made.

Inspection of the set of interesting equalizer outputs in Table 1 confirms that a training symbol appears once with a positive sign and once with a negative sign in each of the 24 possible time phases of the illustrated portion of a DIL segment. Each of these appearances corresponds to an estimate of the amplitude level of the training symbol when observed at the receiver. In an exemplary realization, a complete DIL segment (e.g., DIL segment 350) includes two repetitions (351 and 352) of the partial sequence illustrated in table 1 and therefore yields two such estimates, thereby reducing the error associated with each estimate by 3 dB, assuming that the errors are uncorrelated. In an exemplary realization, DIL sequence (e.g., DIL sequence 340) includes 128 similarly organized DIL segments, one for each possible (positive) Ucode employed in the PSTN (see Table 1/Recommendation V.90). In realizations in accordance with Recommendation V.90, each DIL segment presents a particular Ucode as the training symbol T.

Accordingly, a DIL sequence employing 128 such DIL segments presents each symbol (i.e.,  $A_i$   $\{i = -127, -126, \dots, -1, -0, 0, 1, \dots, 127\}$ ) in each of the 24 possible time phases of the DIL sequence. Such a DIL sequence therefore provides 128 (Ucodes)  $\times$  2 (positive and negative)  $\times$  24 (timing phases) = 6144 estimates, each of which includes the average of two observations of each of 256 amplitudes at each of the 24 timing phases. In the description that follows, an estimate of the  $i^{\text{th}}$  amplitude at the  $k^{\text{th}}$  timing phase is denoted by  $A_{i,k}$  for  $i = -127, -126, \dots, -1, -0, 0, 1, \dots, 127$  and  $k = 0, 1, \dots, 23$ . (Note that the elements  $A_{-0,k}$  and  $A_{0,k}$  are different in general.)

### Exemplary DIL Descriptors

Although persons of ordinary skill in the art will appreciate a variety of impairment compensation sequences in accordance with the present invention, including sequences supplied without use of descriptor request/ sequence supply protocols or using alternate protocols, realizations in accordance with the particular descriptor request/ sequence supply protocols of Recommendation V.90 are illustrative.

As discussed above, an impairment compensation sequence that is a DIL sequence of reference (R) and training (T) symbols in accordance with Recommendation V.90, can be specified according to a logical combination of sign pattern bits ( $SP$ ) and training pattern bits ( $TP$ ). More specifically, a server modem responding in accordance Recommendation V.90 supplies reference and training symbols according to the sign pattern and the training pattern specified by a DIL descriptor. Typically, the particular symbol (reference or training) supplied at index  $j$  of a DIL segment is a function of corresponding  $SP$  and  $TP$  bit values:

R if  $SP_m=1$  and  $TP_n=0$ ;  
 -R if  $SP_m=0$  and  $TP_n=0$ ;  
 T if  $SP_m=1$  and  $TP_n=1$ ; and  
 -T if  $SP_m=0$  and  $TP_n=1$

where  $j = 0, \dots, L_c$ ;  $m = j \bmod L_{SP}$ ; and  $n = j \bmod L_{TP}$ . In the context of realizations in accordance with Recommendation V.90, a single training amplitude is supplied with positive and negative sign in the specified positions of a particular DIL segment.



At least one DIL segment is requested for each training Ucode. Corresponding reference symbols for a group or Uchord of symbols are specified in accordance with the Recommendation V.90-style DIL descriptor format.

Accordingly, in a realization employing a Recommendation V.90-style DIL descriptor to request a DIL sequence of 128 DIL segments, each as illustrated above with reference to Table 1 and respectively corresponding to one of the 128 PCM encoded Ucodes employed in the digital PSTN, a suitable DIL descriptor encodes the following:

10         $X=128$ ;  
            $L_{SP}=52$ ;  $L_{TP}=26$ ;  
            $SP = \{0xA5, 0xA5, 0xA5, 0xA5, 0xA5, 0xA5, 0x05\}$ ;  
            $TP = \{0xCC, 0xCC, 0xCC, 0x00\}$ ;  
            $L_C=210$ ;  $H_C=34$ ; and  
            $REF_C=0$ ;  $c=1,2,\dots,8$ .

15        The DIL segment length,  $L_c$ , is specified as 210, which includes two 104 symbol iterations of the partial DIL segment illustrated in Table 1 with an extra two bits of padding to provide a DIL segment length,  $L_c$ , that is a multiple of six. Sign pattern length,  $L_{SP}$ , and training pattern length,  $L_{TP}$ , are each selected to repeat evenly within the 208 symbol positions (210 less padding) of the DIL segment and provide
 20        two (2) positive sign instances and two (2) negative sign instances of a particular training Ucode in each of the 24 phases of the DIL segment.

25        While a complete set of available symbols may be employed in some realizations, a subset may be selected in accordance with power constraints of the system. More specifically, a specification such as Recommendation V.90, typically
 30        contemplates a limit to the amount of power transmitted across a communication channel. The PCM codeword includes Uchords that transmit at different power levels. Therefore, the set of symbols employed for communication (and included in a DIL sequence), may preferably be chosen to convey as much information as possible within power constraints. In another realization, the DIL sequence employs 112,

## Determination of Characteristic Groups

Based on a received sequence such as the exemplary DIL-sequences described above, a communications device operating in accordance with some embodiments of the present invention groups phases according to correspondence of respective estimates.

5 For example, in some realizations, phases may be grouped by calculating a distance measure between phase-specific amplitude estimates of representative sets of symbols. An illustrative set difference calculation is described in greater detail below. Because the exemplary sequences described above guarantee that individual symbols of a predetermined set appear at least once in each phase, such difference measure  
10 calculations are facilitated.

Using distance measure calculations or other correspondence measurement techniques, phases affected by the same or like impairments can be identified and appropriate compensation can be applied to the group. It is notable that a receiver employing techniques such as described herein makes few *a priori* assumptions about  
15 the communications channel. For example, the receiver of an analog client modem employing such techniques (*see e.g.*, FIG. 2 in which analog client modem 219 receives an impairment compensation sequence from digital server modem 212) need not make assumptions about which timing phases are perturbed by particular forms of RBS, padding or other artifacts of a digital communications channel. Instead, such  
20 techniques exploit the fact that the disturbance(s), if any, introduced by the digital network is periodic in a predetermined number of phases (typically 24). This assumption includes the common cases in which an RBS pattern exhibits a period of 6 or 12.

In the general case, each of the 24 phase intervals (*see e.g.*, FIG. 3A) may, in  
25 theory, be affected by a different impairment or superimposed collection of impairments. Alternatively, each of the 24 phase intervals may be affected by a single impairment (or superimposed collection of impairments) or no impairment at all. Focusing illustratively on RBS impairments, presence of one or two distinct forms of RBS is common with less than all of the phase intervals affected. In general, the  
30 forms of RBS that may affect a phase interval result in: (1) forcing a least significant bit (LSB) of an octet to one; (2) forcing the LSB of an octet to zero; and (3) forcing

the LSB of an octet to a “randomly” selected value, either a zero or a one. Note that selection of a zero or one is only “random” with respect to the symbols conveyed over the communications channel. Selection is, of course, deterministic from the point of view of the in-band signaling that employs it.

5 For simplicity, much of the art assumes that a given phase interval is affected by a single form of RBS, rather than a superposition of multiple forms. Similarly, it is often assumed that the single form of RBS affecting a particular sample is periodic in 6 phase intervals. Strictly speaking, neither simplification is necessarily valid. Instead, persons of ordinary skill in the art will recognize that individual portions of a  
10 communication channel may employ differing forms of RBS in various phase intervals. Accordingly, symbols conveyed over a communication channel in a given phase interval may be affected by multiple RBS forms or other impairments. Furthermore, as described above, the effects of RBS impairments may have periodicity of 12 or 24 phase intervals. Embodiments in accordance with the present  
15 invention may be particularly advantageous in that diagnosis of a particular RBS or other impairment is unnecessary. Whatever the particular forms of RBS active in a communications channel, realizations of the present invention may avoid diagnosis of the particular form(s) of RBS present in a individual phase interval by instead categorizing the phase intervals into characteristic groups according to the similarity  
20 of observed impairments.

Of course, in addition to RBS, other sources of impairments (such as digital attenuation padding) may also affect some or all of the phase intervals. Based on the description herein, persons of ordinary skill in the art will appreciate a wide variety of potential impairments and combinations of impairments that may affect the various  
25 phase intervals. Nonetheless, for clarity and without loss of generality, the description that follows focuses on RBS as the illustrative impairment.

Let the amplitude estimate for the  $i^{\text{th}}$  symbol of a predetermined alphabet at the  $k^{\text{th}}$  timing phase be denoted by  $A_{i,k}$  for  $i = -127, -126, \dots, -1, -0, 0, 1, \dots, 127$  and  $k = 0, 1, \dots, 23$ . (Note that, in general, the elements  $A_{-0,k}$  and  $A_{0,k}$  stand for different  
30 estimates.) Further, define the sets  $\sigma_k = \{A_{i,k}; -127 \leq i \leq 127\}$  for  $k = 0, 1, \dots, 23$ .

That is,  $\sigma_k$  is the set of all amplitude estimates made at timing phase  $k$ . Finally, define  $\Sigma = \{\sigma_0, \sigma_1, \dots, \sigma_{23}\}$ .

Based on the above, an illustrative set difference between  $\sigma_i$  and  $\sigma_j$ , both elements of  $\Sigma$ , can be defined as:

$$d(\sigma_i, \sigma_j) = \sum_{l=-79}^{-48} (A_{l,i} - A_{l,j})^2 + \sum_{l=48}^{79} (A_{l,i} - A_{l,j})^2$$

where the range of index values  $l$  for the summation operators covers a representative subset of amplitude estimates (e.g., amplitude estimates for PCM code words corresponding to Uchord<sub>4</sub> and Uchord<sub>5</sub> as defined employed in modem communications in accordance with Table 1 of Recommendation V.90). Of course, the particular subset is merely illustrative and persons of ordinary skill in the art will recognize that any representative subset of transmitted symbols (including all the transmitted symbols) may be employed. Typically, impairment compensation sequences and constellations employed for data communication do not employ a complete set of symbols (e.g., all 256 signed Ucodes) based on power considerations.

Note that the above sum-of-squares set difference calculation is merely illustrative, and any of a variety of measures for establishing correspondence between phase-specific sets of estimates is suitable. For any suitable difference measure, a threshold or similar technique may be employed to discriminate between phases to be attributed to the same or different characteristic groups.

Based on the above, it is possible to define various subsets of  $\Sigma$ ,

$\Gamma = \{\gamma_0, \gamma_1, \dots, \gamma_{M-1}\}$ , with the properties that  $\bigcup_{i=0}^{M-1} \gamma_i = \Sigma$  and  $\gamma_i \cap \gamma_j = \emptyset, i \neq j$ , where  $\emptyset$  denotes the empty set. That is,  $\gamma_m$  includes the set of amplitude estimates corresponding to phase intervals that can be associated with an  $m^{\text{th}}$  characteristic group, where  $m = 0, 1, \dots, M-1$  and  $1 \leq M \leq 24$ . Define  $s_m$  to be the number of elements of  $\gamma_m$ . In general, a value of  $M = 24$  corresponding to 24 characteristic groups each with a single corresponding phase interval ( $s_m = 1$ ) may arise if each phase interval exhibits dissimilar impairment characteristics (e.g., 24 distinct RBS

forms). More typically, a value such as  $M = 3$  may arise if the 24 phase intervals can be associated with 3 dissimilar sets of impairment characteristics (e.g., 3 distinct RBS forms, including no RBS) wherein  $\sum_{m=0}^2 s_m = 24$ . To facilitate grouping of phase intervals into characteristic groups, it is possible, for each  $\gamma_m$ , to choose a representative set of amplitude estimates,  $\sigma'_m$ , such that  $\sigma'_m \in \Sigma$ ,  $\sigma'_m \in \gamma_m$  and  $\sigma'_i \notin \gamma_m$  if  $i \neq m$ . In general,  $\sigma'_m$  is any set of amplitude estimates that is representative of the  $m^{\text{th}}$  characteristic group. In some realizations,  $\sigma'_m$  is a composite (or average) of estimates from the various phase intervals that have been associated with the  $m^{\text{th}}$  characteristic group.

Based on the above definitions, the following pseudocode illustrates a sequence of operations that may be implemented in a communication device (e.g., in software or firmware) for defining a set of characteristic groups and associating individual phase intervals with the characteristic groups.

Initial step:

15         $M = 1$   
            $\gamma_0 = \{\sigma_0\}$   
            $\sigma'_0 = \sigma_0$   
            $s_0 = 1$

General step:

20        for  $k=1$  to 23 {  
           found = false  
           for  $m=0$  to  $M-1$  {  
              if  $(d(\sigma'_m, \sigma_k) < \theta)$  {  
                   $\gamma_m = \gamma_m \cup \{\sigma_k\}$   
                   $s_m = s_m + 1$   
                  found = true  
                  break  
              }  
           }  
           if !found {  
               $M = M + 1$   
               $\gamma_{M-1} = \{\sigma_k\}$   
               $\sigma'_{M-1} = \sigma_k$

$$s_{M-1} = 1$$

where  $\theta$  is any suitable threshold for discriminating between phase intervals

- 5 exhibiting similar and dissimilar impairment characteristics (e.g., in one realization,  $d(\sigma_i, \sigma_j)$  is small and  $\sigma_i$  and  $\sigma_j$  are to be grouped if  $d(\sigma_i, \sigma_j) \leq \theta$ ). Note that use of a distance measure  $d(\sigma_i, \sigma_j)$  such as the above-described sum-of-squares set difference calculation is merely illustrative and persons of ordinary skill in the art will appreciate a wide variety of suitable discrimination functions.

- 10 In some realizations, the threshold value,  $\theta$ , employed may be predetermined (e.g., empirically), while in others, the threshold value may be computed based on observed sets of estimates. In one such realization, a threshold may be established based on observed distance measures between the sets of amplitude estimates. For example, one such realization:

15 
$$\theta = \alpha \min_{i,j} (d(\sigma_i, \sigma_j))$$

where  $\alpha$  is selected to baseline the threshold off of a minimum distance between the sets of amplitude estimates. In one realization  $\alpha = 3/2$ .

- While the above illustrated pseudocode groups a given phase interval with the first characteristic group for which a distance measure is below a threshold, it has  
20 been observed that such an implementation may not group a particular phase interval with those that best match its impairment characteristics. Accordingly, an improved realization (below) illustrates a sequence of operations that may be implemented in a communication device (e.g., in software or firmware) for defining a set of characteristic groups and associating individual phase intervals with the characteristic  
25 groups that better corresponds to observed impairment characteristics.

Initial step:

$$\begin{aligned} M &= 1 \\ \gamma_0 &= \{\sigma_0\} \\ \sigma'_0 &= \sigma_0 \end{aligned}$$

$$s_0 = 1$$

General step:

```

    for k=1 to 23 {
        MinDistance = d( $\sigma'_0, \sigma_k$ )
        MinIndex = 0
        for m=1 to M-1 {
            distance = d( $\sigma'_m, \sigma_k$ )
            if (distance < MinDistance) {
                MinDistance = distance
                MinIndex = m
            }
        }
        if (MinDistance <  $\theta$ ) {
             $\gamma_{MinIndex} = \gamma_{MinIndex} \cup \{\sigma_k\}$ 
             $s_{MinIndex} = s_{MinIndex} + 1$ 
        }
        else {
            M = M + 1
             $\gamma_{M-1} = \{\sigma_k\}$ 
             $\sigma'_{M-1} = \sigma_k$ 
             $s_{M-1} = 1$ 
        }
    }

```

where each set of amplitude estimates,  $\sigma_k$ , for a particular phase interval is added to a characteristic group to which it best corresponds,  $\gamma_{MinIndex}$ , if the distance measure between that set of amplitude estimates and the characteristic group is less than a threshold. Otherwise, a new group is defined.

While a variety of suitable implementations will be appreciated by persons of ordinary skill in the art based on the above descriptions and pseudocode, the flow chart of **FIG. 4** illustrates one suitable sequence of operations. Initially, amplitudes estimates for one of the 24 phase intervals are treated (402) as representatives of a first characteristic group. Typically, estimates for phase interval 1 are assigned to the first characteristic group, although the particular phase interval assigned is arbitrary. In general, phase interval 1 may be subject to RBS, padding or no periodic impairment at all. Next, amplitude estimates associated with another phase interval (typically, phase interval 2) are evaluated against then current characteristic groups. In the illustrative realization of **FIG. 4**, evaluation includes calculating (406) a set

difference measure (such as described above) between amplitude estimates for the current phase interval (e.g., phase interval 2) and representatives of each characteristic group (e.g., group 1 characterized by amplitude estimates of phase interval 1). Based on comparison with each of the characteristic groups, a best matching characteristic group is identified. If the set difference measure meets a match criterion (e.g., if the set difference measure is below a threshold value), then the current phase interval may be added (408) to the matching characteristic group. If not, a new characteristic group is defined (410) using amplitude estimates of the current phase interval as representative thereof.

10 Focusing on an exemplary realization, assignment of a phase interval to a characteristic group may be based on use of a distance calculation that focuses on a representative subset of amplitude estimates. For example, in some realizations, estimates of symbols corresponding to Uchords four and five are employed. In one such realization, a set difference calculation is performed during a first pass through  
15 loop 404, comparing amplitude estimates  $\sigma_2$  obtained in the second timing phase with a first group  $\gamma_1$  characterized by amplitude estimates  $\sigma'_1$  obtained in the first timing phase, and can be represented as follows:

$$d(\sigma_2, \sigma'_1) = \sum_{l=-79}^{-48} (A_{l,2} - A'_{l,1})^2 + \sum_{l=48}^{79} (A_{l,2} - A'_{l,1})^2$$

Later passes through loop 404 may include comparisons with larger numbers of then-  
20 defined characteristic groups.

The quality of amplitude estimates used to characterize individual groups can be improved by combining contributions from the various phase intervals that are assigned to the characteristic group. For example, in a characteristic group that includes two or more timing intervals, the set of amplitude estimates corresponding to  
25 the same codeword may be averaged or otherwise combined (e.g., using any suitable computational method) for each of the corresponding phase intervals. In an illustrative realization, an averaged value  $A'_{i,m}$  for the  $i^{\text{th}}$  amplitude estimate characteristic of the  $m^{\text{th}}$  group may be calculated as follows:

for  $i = -127$  to  $127$  (each amplitude estimate) {



```

for m=0 to M-1 (each group) {
    A'_{i,m}=0
    for k=0 to 23 (each phase) {
        if (σ_k ∈ γ_m) {
5           A'_{i,m} = A'_{i,m} + A_{i,k}
        }
    }
    A'_{i,m} = A'_{i,m} / s_m
10 }
}

```

where  $\sigma'_m = \{A'_{i,m}; -127 \leq i \leq 127\}$ ,  $0 \leq m \leq M-1$ . Persons of ordinary skill in the art will appreciate that the above pseudocode is merely illustrative and that a particular implementation may employ similar techniques at any of a variety of points in a computation. For example, while some realizations may average amplitude estimates associated with a characteristic group after assignment of phase intervals to

15 characteristic groups, others incrementally refine (see 409, FIG. 4) a representative set  $\sigma'_m$  of amplitude estimates for each characteristic group using amplitude estimates from each assigned phase interval.

#### Assignment of Constellation Points

20 Based on a grouping of phase intervals, such as the exemplary set difference measure based grouping described above, a communications device operating in accordance with some embodiments of the present invention assigns constellation points based on the characteristics of grouped phases. For example, in some realizations, constellation points are assigned for each of several distinct constellation

25 indices by selecting, for each such constellation index, successive candidate next constellation points that, based on symbol estimates for the one or more characteristic sets corresponding to the constellation index, satisfy a distance metric with respect to a last assigned constellation point for the constellation index. From such a set of candidates, successive lowest power candidates are assigned as next constellation

30 points in respective constellations.

As before, realizations of the present invention may be better understood in the context of an illustrative embodiment in accordance with Recommendation V.90. Also as before, illustrative V.90 embodiments are not meant to be limiting. To the

contrary, based thereon, persons of ordinary skill in the art will appreciate a variety of suitable realizations including those suitable for operation in the context of other standards, future standards and non-standard communication facilities or protocols.

Similarly, the preceding description identifies a particularly advantageous organization for an impairment compensation sequence (sometimes encoded as a Digital Impairment Learning (DIL) sequence in accordance with Recommendation V.90) and related techniques for grouping phase intervals based on correspondence of apparent aggregate impairments. While grouping of phase intervals based on estimates of received symbols corresponding to a 24 phase DIL sequence with characteristics such as described above is preferable, other methods of grouping may be employed as a precursor to the assignment of constellation points now described. For example, in one realization grouping is based on a 6 phase view of received sequences such that there is a one-to-one correspondence between phase intervals and constellation indices. These and other variations will be appreciated by persons of ordinary skill in the art based the description that follows.

In view of the foregoing, an illustrative V.90-oriented embodiment is now described. Recommendation V.90 provides for six sets of constellation points, one for each of six timing instants (or constellation indices) from 0 to 5. As described above, one particularly advantageous view of a DIL sequence is as a 24-phase symbol sequence, wherein a variety of potential impairments are known to be periodic at least in 24 phase intervals (if not 6 or 12 phase intervals). In such an illustrative framework, a  $k^{\text{th}}$  constellation index corresponds to four phase intervals  $k$ ,  $k+6$ ,  $k+12$  and  $k+18$ . Accordingly, in realizations that employ a 24-phase view of symbol sequences, group associations for each of the corresponding four phase intervals may be employed in the assignment of successive constellation points for a given constellation index. Of course, in general, actual groupings are dependent on the particular impairment characteristics of a communication channel. Accordingly, based on the particular impairments active in particular timing phases of a particular communications channel, the four phase intervals corresponding to a particular constellation index may be associated with 1, 2, 3 or 4 groups.

In a simplified realization, two general cases need to be considered. In the first case, each of the phase intervals corresponding to a constellation index is associated with a same characteristic group. In mathematical terms, each of the phase intervals is associated with set of amplitude estimates characteristic of group  $\gamma_m$ , i.e.,

- 5  $\sigma_k \in \gamma_m$ ;  $\sigma_{k+6} \in \gamma_m$ ,  $\sigma_{k+12} \in \gamma_m$ , and  $\sigma_{k+18} \in \gamma_m$  for some  $m$ . In this case, the set of symbol estimates  $\sigma'_m = \{A'_{i,m}; -127 \leq i \leq 127\}$  can be used for selection of constellation points as follows: Let  $i_1$  be the smallest positive value of  $i$  such that  $A'_{i,m} - A'_{-i,m} \geq d_{\min}$ . For  $r \geq 2$ , let  $i_r$  be the smallest positive value of  $i$  such that  $A'_{i,m} - A'_{i_{r-1},m} \geq d_{\min}$  and  $A'_{-i_{r-1},m} - A'_{-i,m} \geq d_{\min}$ . Continue this process for  $r = 3, 4, \dots$  as
- 10 long as the constellation power (e.g., as defined in Clause 8.5.2 of Recommendation V.90) does not exceed the maximum average power ( $P_{\max}$ ) or until all the points in the set  $\sigma'_m$  (i.e., points corresponding to  $0 \leq i \leq 127$ ) have been exhausted. The resulting set  $\{i_1, i_2, \dots, i_r\}$  defines the constellation for constellation index  $k$ .

- 15 In the second case, the corresponding phase intervals are not all associated with the same characteristic group. Instead, the phase intervals may be associated with two, three or four characteristic groups. For example, in the case of  $\sigma_k \in \gamma_{m_1}$ ,  $\sigma_{k+6} \in \gamma_{m_2}$ ,  $\sigma_{k+12} \in \gamma_{m_3}$ , and  $\sigma_{k+18} \in \gamma_{m_4}$  where  $m_1, m_2, m_3, m_4$  are not all equal, the sets of symbol estimates  $\sigma'_{m_1}$ ,  $\sigma'_{m_2}$ ,  $\sigma'_{m_3}$ , and  $\sigma'_{m_4}$  are used as follows for selection of constellation points for constellation index  $k$ : Let  $i_1$  be the smallest positive value
- 20 of  $i$  for which symbol estimates  $A'_{i,m_\ell} - A'_{-i,m_\ell} \geq d_{\min}$  for every  $\ell \in \{1, 2, 3, 4\}$ . For  $r \geq 2$ , let  $i_r$  be the smallest positive value of  $i$  such that:
- $\min\{(A'_{i,m_\ell} - A'_{i_{r-1},m_\ell}), (A'_{-i_{r-1},m_\ell} - A'_{-i,m_\ell})\} \geq d_{\min}$  for every  $\ell \in \{1, 2, 3, 4\}$ . Continue this process for  $r = 3, 4, \dots$  as long as the constellation power does not exceed  $P_{\max}$  or until all the points in the set corresponding to  $0 \leq i \leq 127$  have been exhausted. The
- 25 resulting set  $\{i_1, i_2, \dots, i_r\}$  defines the constellation for constellation index  $k$ .

Note that the final constellation is typically subject to additional manipulation that is somewhat independent of the techniques described herein. In particular, legal regulations prohibit modems from transmitting at a power level that is greater than a

specified maximum. This restriction sometimes leads to creation of a constellation for which addition of an additional point would exceed the maximum power, but such that using the derived set of points fails to use all of the power available. In that instance the distance between the points in the resulting set can be increased in order to improve performance. Therefore, in practice an additional iteration can be performed on the set of constellation points obtained by following the above procedure. This iteration can be applied in addition to the steps described above.

Building on the above, some additional realizations are notable. For example, FIG. 5 illustrates a variation in which constellation points are assigned to constellations for each of 6 constellation indices in a manner that advantageously utilizes overall constellation power (i.e., power collectively employed by a statistical distribution of information transmitted in phase intervals corresponding to each of the constellation indices) to maximize information capacity. As before, an initial point is selected for each of 6 constellations. In particular, a minimal Ucode is selected (501) such that, for each corresponding group (e.g., in an exemplary embodiment, the 1, 2, 3 or 4 groups associated with the four phase intervals corresponding to a given constellation index), the difference between amplitude estimates for positive and negative receptions of the Ucode is at least  $d_{min}$ . Generally, the  $d_{min}$  parameter relates to an estimated signal-to-noise ratio on the telephone line and determines the minimum spacing between constellation points consistent with a given level of performance. Additionally, legal regulations prohibit modems from transmitting at certain power levels. Recommendation V.90 defines this restriction, which is hereinafter referred to as maximum power level,  $P_{max}$ .

Note that in the Ucode set defined by Table 1 of Recommendation V.90, Ucodes are organized in order of increasing power. Accordingly, in an illustrative V.90 realization, a minimal Ucode is a lowest number Ucode that meets the  $d_{min}$  criterion. For each of the 6 constellations such a minimal Ucode is identified and added (502) as a first constellation point. Persons of ordinary skill in the art will appreciate suitable interpretations for other coding schemes.

Successive constellation points are added to the 6 constellations as follows. For each of the K constellation indices, a minimal candidate Ucode is identified based

on evaluation of a minimum spacing criterion in the context of amplitude estimates from the characteristic group (or groups) corresponding thereto. In an exemplary realization, the minimum spacing criterion is based on the difference between a group-specific amplitude estimate and the Ucode last added to a current constellation  
 5 exceeding  $d_{min}$ . Then, a minimal one of the 6 minimal candidates is selected for addition to its corresponding constellation.

For example, assume that based on an evaluation (503) of the  $d_{min}$  criterion in the context of two characteristic groups  $\gamma_1$  and  $\gamma_2$  of amplitude estimates associated with phase intervals 4, 10, 16, and 22 corresponding to a 4<sup>th</sup> constellation index,  
 10 Ucode<sub>22</sub> is the minimal Ucode for which estimates from both groups exceed the Ucode last added to constellation 4 by at least  $d_{min}$ . Further assume that the similarly calculated (503) minimal candidates for the 0<sup>th</sup>, 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> and 5<sup>th</sup> constellation indices are Ucode<sub>23</sub>, Ucode<sub>24</sub>, Ucode<sub>24</sub>, Ucode<sub>23</sub> and Ucode<sub>24</sub>, respectively based on the aggregate impairments observed in each of the phase intervals corresponding  
 15 thereto (i.e., based comparison of the amplitude estimates for the corresponding characteristic groups with respective last added constellation points). Based on the foregoing, Ucode<sub>22</sub> is selected (505) as the minimal one of the candidate Ucodes and is added (504) to the corresponding constellation (i.e., constellation 4). A next candidate is calculated (503) for the 4<sup>th</sup> constellation index and a minimal one of the  
 20 then current candidates is again selected for addition to its corresponding constellation. For example, assuming that the next candidate for the 4<sup>th</sup> constellation index is Ucode<sub>24</sub>, a minimal candidate (Ucode<sub>23</sub>) is added to constellation 0. The process continues until a selected candidate would, if added, cause overall constellation power to exceed a maximum level, e.g.,  $P_{max}$ .

25 While the above description has assumed that all 6 constellation indices are distinct, this need not be the case. Indeed, performance advantages may be achieved if constellation assignment calculations are not duplicated for indistinct indices. For example, based on the description herein, persons of ordinary skill in the art will appreciate that if the set of characteristic groups associated with corresponding phase  
 30 intervals of two or more constellation indices are the same (i.e., the two or more constellation indices are indistinct), then selections performed for one constellation index may be used in each of the others.

Resulting constellations may be transmitted to a remote communications device, e.g., to a remote V.90 server modem, using any suitable mechanism. For example, after an analog client modem operating in accordance with an embodiment of the present invention receives a DIL sequence, groups phases and assigns  
5 constellation points as described above, it may transmit an encoding of the resulting constellations back to a digital server modem. In one such realization, at least the assignment of constellation points is performed during the Phase 4—Final Training period defined by Recommendation V.90. Constellation parameter transfer protocols and mechanisms such as that defined by Recommendation V.90 are well known and  
10 realizations in accordance with the present invention may use any transfer mechanism suitable for the communications devices and/or communications channels employed.

### **Exemplary Communication Systems and Device Embodiments**

A typical communications system in accordance with the present invention includes a receiver (typically including an equalizer) to receive an impairment  
15 compensation sequence such as described above. Typically, such a receiver is provided as part of a communications device such as an analog V.90 modem, although other realizations will be appreciated by persons of ordinary skill in the art based on the description herein. In some realizations, characteristic groups are determined and impairment sensitive selection of constellation points is performed  
20 based on the received impairment compensation sequence. In general, suitable impairment compensation sequences are selected in accordance with the particular signal processing structures employed by the receiver. For example, some of the description above emphasized impairment compensation sequences suitable for a receiver employing a partial-response IV equalizer (PRIV) or partial-response V  
25 equalizer (PRV). While not limited thereto, suitable realizations may be understood in the context of particular communications system and device configurations (including modems conforming to Recommendation V.90) employing a partial response class V (PRV) equalizer structure such as described in greater detail in co-  
30 pending U.S. Patent Application Number 09/249,990, filed on February 13, 1999, entitled "Efficient Reduced State Maximum Likelihood Sequence Estimator," the entirety of which is incorporated by reference herein.

Referring illustratively to **FIG. 6**, an exemplary V.90 modem implementation employs a reduced state maximum likelihood sequence estimator and a partial response class V equalizer. A brief description of the illustrated modem will provide a context for better understanding some device embodiments in accordance with the present invention. A detailed discussion of the operation of the exemplary modem is omitted since modem operation in conformance with Recommendation V.90 is known the art. More detailed information may be found in the above-incorporated U.S. Patent Application and in Recommendation V.90. In an illustrative embodiment, partial response equalizer **919** is implemented in software that may be stored on computer readable media that can be executed on a suitable processor. Those of skill in the art will appreciate that the teachings herein may be applied to a variety of modem and communication device implementations including those employing a programmable digital signal processor and/or specialized logic.

The illustrated modem includes both transmitter **601** and receiver **603** portions. In general, DIL descriptor information is supplied using transmitter portion **601**, while a corresponding DIL sequence is received using receiver portion **603**. Constellations selected as described herein are communicated using transmitter portion **601**. Transmitter data module **605** supplies a digital bit stream to encoder **607**. Transmitter data module **605** may generate such digital data locally in the case of startup or training (including DIL descriptor supply) or may fetch or receive data from an external data source or application program (not shown) in data mode. Transmitter data module **605** passes the data to the encoder **607**, which in turn converts the input bit stream into a sequence of symbols that are then provided to modulator **609**. Modulator **609** performs appropriate sampling and filtering operations and provides its output to shaping and preemphasis filter **611**, which in turn provides square-root-of raised cosine shaping as well as preemphasis filtering as specified by Recommendation V.90. Note that during certain phases of modem operation, including supply of a DIL descriptor, spectral shaping is disabled. The resultant modulated, encoded signal is supplied to a communications channel (not shown) by digital-to-analog converter **613**.

Receiver portion **603** of the illustrated modem receives the output from the transmitter (prior to the D/A) into receiver front end **615**. Receiver front end also

receives a received signal **616** from the communications channel. Receiver front end **615** performs operations such as analog-to-digital conversion on the received signal, various filtering and echo-canceling operations and provides its output to demodulator **617**. Demodulator **617** includes partial response class V equalizer **619**. Accordingly,

5 DIL sequences organized as described above for PRV equalizers are suitable for supply to the illustrated modem and characteristic group determinations and impairment sensitive selection of constellation points based on the equalized DIL sequences may be employed. In the illustration of **FIG. 6**, demodulator **617** also includes a second stage near-end echo canceller **620**, which cancels the echo at the

10 output of the equalizer and is intended to track slow variations of the echo signal. The output of the partial response equalizer is provided to decoder **621**, and more specifically to reduced state maximum likelihood sequence estimator **623** thereof.

In data mode, symbols decoded by maximum likelihood sequence estimator **623** are split into sign and amplitude components and passed respectively to the

15 spectral de-shaper **625** and modulus decoder **627**. These modules extract the data payload from the symbols that is later converted to a bit stream by data assembler **629**. Receive data module **631** descrambles the bit stream and, in general, passes it to an application program (not shown).

For DIL operations described herein, amplitude estimates are, in general,

20 processed at the equalizer output although other points in the signal flow of **FIG. 6** may also be suitable. In particular, based on such amplitude estimates, the illustrated modem assigns each phase of the received sequence to a characteristic group as described in greater detail above. Similarly, constellation points are selected for each

25 characteristic group of phases as described in greater detail above. Constellation point selections are transmitted to a remote modem (not shown) using transmitter portion **601** in accordance with the "Phase 4 – Final training" protocol of Recommendation V.90.

In general, techniques described herein support improved impairment compensation sequences, methods and signal processing configurations. In some

30 realizations, improved digital impairment learning in accordance with Recommendation V.90 is provided. Based on the description herein, persons of



ordinary skill in the art will appreciate a variety of applications of the underlying techniques and the breadth of the invention. Without limitation thereto, a V.90 modem configuration provides a useful example. Some of the exemplary embodiments have been described in a largely software context to provide clarity to the invention. While such software implementations of the invention are certainly contemplated, the teachings disclosed herein may also be used by persons of ordinary skill in the art to implement the present invention in a hardware or mixed hardware/software context without departing from the scope of the invention.

**WHAT IS CLAIMED IS:**

1           1. A method of operating a communications device to compensate for one or  
2 more potential impairments in a communication channel, each periodic in N timing  
3 phases thereof, the method comprising:

4           receiving a sequence via the communication channel and estimating symbols  
5           thereof, the sequence organized such that corresponding instances of  
6           one or more symbols of a predetermined set appear in each of the N  
7           phases;

8           grouping the N phases into one or more groups thereof based on  
9           correspondence of respective estimates of the corresponding symbol  
10          instances; and

11          for each group, compensating for an aggregate effect of the impairments on  
12          the grouped phases without identification of individual impairments  
13          active in the particular phases.

1           2. A method, as recited in claim 1,  
2           wherein the received sequence includes an impairment compensation sequence  
3           transmitted by a remote communications device.

1           3. A method, as recited in claim 1,  
2           wherein the received sequence includes a Digital Impairment Learning (DIL)  
3           sequence in accordance with ITU-T Recommendation V.90.

1           4. A method, as recited in claim 1,  
2           wherein the communications channel includes at least one portion susceptible  
3           to robbed bit signaling (RBS).

1           5. A method, as recited in claim 1,  
2           wherein the communications channel traverses a portion of a public switched  
3           telecommunications network (PSTN) susceptible to the one or more  
4           potential impairments each periodic in the N phases.

1           6. A method, as recited in claim 1,

2 wherein  $N = 24$ .

1 7. A method, as recited in claim 1, wherein the grouping based on  
 2 correspondence includes:  
 3 comparing amplitude estimates for each of the phases with corresponding  
 4 estimates characteristic of the groups.

1 8. A method, as recited in claim 1, wherein the grouping based on  
 2 correspondence includes:  
 3 computing distance measures based on the respective estimates; and  
 4 selecting for inclusion in a particular group, those phases for which the  
 5 computed distance measures are less than a threshold.

1 9. A method, as recited in claim 8,  
 2 wherein the distance measures are based on comparison of respective  
 3 estimates for plural symbols of the predetermined set thereof.

1 10. A method, as recited in claim 9,  
 2 wherein the plural symbols correspond to one or more Uchords.

1 11. A method, as recited in claim 1,  
 2 wherein the compensating includes training an adaptive structure for use in the  
 3 grouped phases.

1 12. A method, as recited in claim 1,  
 2 wherein the compensating includes defining a constellation for use in the  
 3 grouped phases.

1 13. A method, as recited in claim 1,  
 2 wherein at least some of the potential impairments are not periodic in 6 timing  
 3 phases.

1           14. In a communications system susceptible to one or more potential  
2 impairments, a method of categorizing N phases of a received sequence of amplitude  
3 estimates according to impairments present therein, the method comprising:  
4           organizing the received amplitude estimates into the N phases, wherein N is  
5           selected such that each potential impairment, if present, is periodic  
6           therein; and  
7           for each of the N phases, comparing one or more sets of amplitude estimates  
8           thereof to respective one or more sets of the amplitude estimates of  
9           other phases of the N phases to categorize the N phases into one or  
10          more groups according to similarity of the impairments, if any, present  
11          therein.

1           15. The method recited in claim 14 wherein the comparing includes:  
2           calculating a difference measure between the set of amplitude estimates and a  
3           set of corresponding amplitude estimates in another phase; and  
4           comparing the difference measure with a threshold.

1           16. The method recited in claim 15 wherein for a particular phase, the  
2           calculating and comparing includes:  
3           determining a set of difference measures, each difference measure being a  
4           measure between the particular phase and another phase, the another  
5           phase representing an identified characteristic group of phases grouped  
6           according to similarity of impairments, if any;  
7           finding a minimal difference measure from the set of difference measures;  
8           if the minimal difference measure is less than the threshold, including the  
9           particular phase in the identified characteristic group; and  
10          otherwise, defining the particular phase as a member of a new characteristic  
11          group.

1           17. The method recited in claim 15,

2 wherein the difference measure is a determination between the set of  
3 amplitude estimates and the corresponding set of amplitude estimates,  
4 a result being squared and summed together.

1 18. The method recited in claim 15,  
2 wherein the set of amplitude estimates and the corresponding set of amplitude  
3 estimates each have two or more estimates of a same codeword within  
4 the respective phase, the two or more estimates of the codeword being  
5 averaged to increase accuracy.

1 19. The method recited in claim 16, wherein the particular phase is a first  
2 phase, the first phase being any one of the N phases, the first phase identifying a first  
3 characteristic group.

1 20. The method recited in claim 16, further comprising:  
2 identifying at least one phase of the N phases as representing a characteristic  
3 group.

1 21. The method recited in claim 14,  
2 wherein the potential impairments include at least one form of robbed-bit  
3 signaling (RBS).

1 22. The method recited in claim 14,  
2 wherein the potential impairments include digital attenuation padding.

1 23. The method recited in claim 14, wherein N is 24.

1 24. The method recited in claim 14, wherein the impairments to which the  
2 communications channel is subject include robbed-bit signaling and padding  
3 impairments.

1 25. The method recited in claim 15, wherein the threshold is predetermined.

1           26. The method recited in claim 15, wherein the threshold is a function of  
2 distance measures between respective subsets of the amplitude estimates.

1           27. The method recited in claim 14, further comprising:  
2 choosing the set of amplitude estimates for comparison according to power  
3 constraints.

1           28. The method recited in claim 16, further comprising:  
2 for each identified characteristic group, averaging amplitude estimates,  
3 wherein groups of the amplitude estimates identify codewords, the  
4 averaging including:  
5 identifying a plurality of corresponding codewords from each phase in  
6 the characteristic group; and  
7 averaging the corresponding estimates for each codeword.

1           29. The method recited in claim 28, wherein the corresponding estimates of  
2 codewords include positive and negative estimates of codewords within a phase in the  
3 characteristic group.

1           30. The method recited in claim 28, wherein the codewords are PCM  
2 codewords.

1           31. The method recited in claim 15, wherein for a particular phase, the  
2 comparing includes:  
3 comparing a measure between a set of amplitude estimates and another set of  
4 amplitude estimates of an identified characteristic group with a  
5 threshold;  
6 if the difference measure is less than the threshold, including the particular  
7 phase in the identified characteristic group;  
8 otherwise repeating the comparing with a next set of amplitude estimates of a  
9 next characteristic group; and  
10 if no further characteristic groups are defined, defining the particular phase as  
11 a member of a new characteristic group.

1           32. The method recited in claim 16, further comprising:  
2           identifying at least one phase of the N phases as representing a characteristic  
3           group.

1           33. A communications device for a communications system susceptible to one  
2           or more potential impairments each periodic in an integer number of symbols  
3           transmitted across a channel, the communications device comprising:  
4           a receiver for receiving a sequence of symbols transmitted across the channel,  
5           the receiver producing a sequence of amplitude estimates; and  
6           a digital impairment component to categorize N phases of the sequence of  
7           amplitude estimates according to impairments present therein, the  
8           digital impairment component including:  
9           an organize component to organize the received amplitude estimates  
10           into the N phases, wherein N is selected such that each  
11           potential impairment, if present, is periodic therein; and  
12           for each of the N phases, a grouping component to compare one or  
13           more sets of amplitude estimates thereof to a respective one or  
14           more sets of the amplitude estimates of other phases of the N  
15           phases to categorize the N phases into one or more groups  
16           according to similarity of impairments present therein.

1           34. The communications device recited in claim 33 wherein the grouping  
2           component calculates a difference between the set of amplitude estimates and a set of  
3           corresponding amplitude estimates, and compares the difference with a threshold.

1           35. The communications device recited in claim 34 wherein for a particular  
2           phase:  
3           the grouping component determines a set of difference measures, each  
4           difference measure being a measure between the particular phase and  
5           another phase, the another phase representing an identified  
6           characteristic group of phases grouped according to similarity of  
7           impairments, if any;

8 the grouping component finds a minimal difference measure from the set of  
 9 difference measures;  
 10 if the minimal difference measure is less than the threshold, the grouping  
 11 component includes the particular phase in the identified characteristic  
 12 group; and  
 13 otherwise, the grouping component defines the particular phase as a member  
 14 of a new characteristic group.

1 36. The communications device recited in claim 35 further comprising:  
 2 for each identified characteristic group, averaging amplitude estimates,  
 3 wherein groups of the amplitude estimates identify codewords, the  
 4 averaging including:  
 5 identifying a plurality of estimates corresponding to codewords from  
 6 each phase in the characteristic group; and  
 7 averaging the corresponding estimates for each codeword.

1 37. The communications device recited in claim 36 wherein the  
 2 corresponding estimates of codewords include positive and negative estimates of  
 3 codewords within a phase in the characteristic group.

1 38. The communications device recited in claim 36 wherein the codewords  
 2 are PCM codewords.

1 39. A computer program product comprising:  
 2 instructions executable on at least one processor to at least partially implement  
 3 a communications device; and  
 4 said instructions including a communication subset thereof executable to adapt  
 5 the communications device to establish communication across a  
 6 channel susceptible to one or more potential impairments each periodic  
 7 in an integer number of symbols transmitted across the channel, the  
 8 instructions executable to cause the communications device to:  
 9 receive a sequence of amplitude estimates;



10                   organize the received amplitude estimates into the N phases, wherein  
 11                   N is selected such that each potential impairment, if present, is  
 12                   periodic therein; and  
 13                   for each of the N phases, compare a set of amplitude estimates thereof  
 14                   to a respective one or more sets of the amplitude estimates of  
 15                   other phases of the N phases to categorize the N phases into  
 16                   one or more groups according to similarity of impairments  
 17                   present therein.

1                   40. A computer program product as in claim 39 wherein the instructions are  
 2                   encoded by or transmitted in at least one computer readable medium selected from the  
 3                   set of a disk, tape or other magnetic, optical, or electronic storage medium and a  
 4                   network, wireline, wireless or other communications medium.

1                   41. An apparatus comprising:  
 2                   a receive path coupled to receive sequences susceptible to one or more  
 3                   impairments periodic in N phase intervals; and  
 4                   means for grouping the phase intervals according to apparent aggregate effect  
 5                   of the impairments thereon without identification of individual  
 6                   impairments active in the particular phases.

## **CATEGORIZATION OF IMPAIRMENTS AFFECTING A COMMUNICATION CHANNEL**

Haixiang Liang

### **ABSTRACT OF THE DISCLOSURE**

5           An impairment compensation sequence for use in a communications system  
susceptible to one or more potential impairments each periodic in an integer number  
of symbols includes N phases, wherein N is selected such that each potential  
impairment, if present, is periodic therein, and a sequence of symbols, the sequence  
10           organized to place at least one instance of each symbol from a predetermined set of  
symbols in each phase to allow detection of the potential impairments in each of the N  
phases. The potential impairments may include robbed-bit signaling and padding.  
Using estimates prepared based on such an impairment compensation sequence,  
individual phase intervals may be grouped according to similarity of apparent  
15           aggregate effect of the impairments thereon without identification of individual  
impairments active in the particular phases. Constellation points may then be  
assigned based on group characteristics corresponding to phase intervals. In an  
exemplary realization, constellation points are assigned for each of 6 constellation  
indices based on amplitude estimates characteristic of the groups with which each of 4  
corresponding phase intervals are associated.

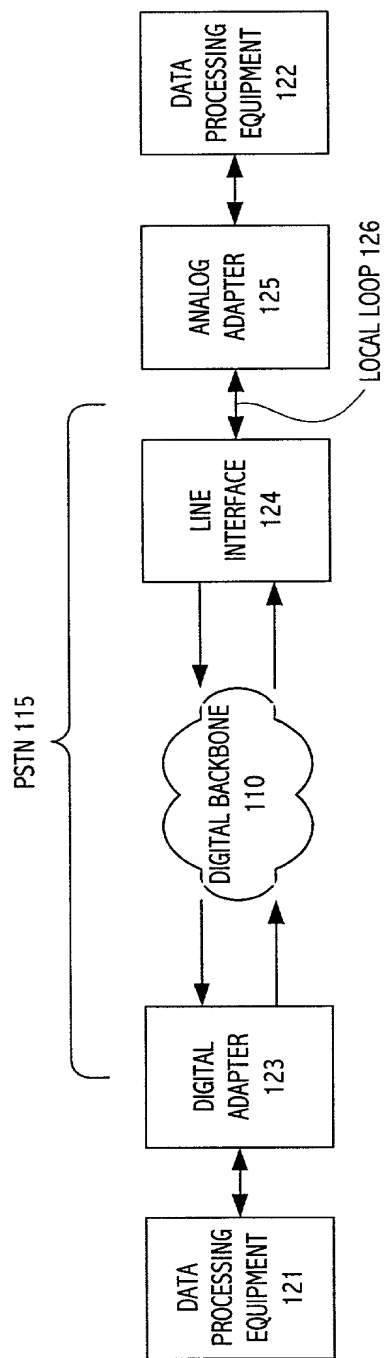


FIG. 1 (PRIOR ART)

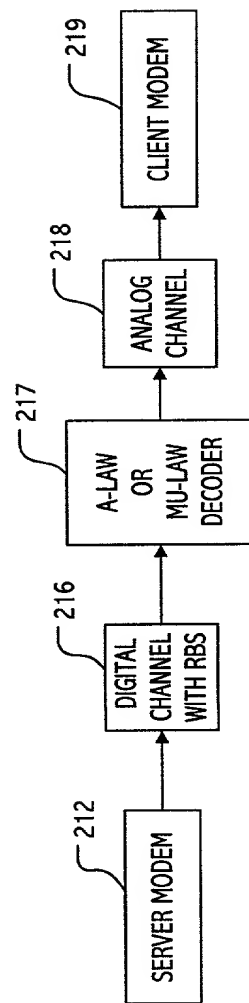
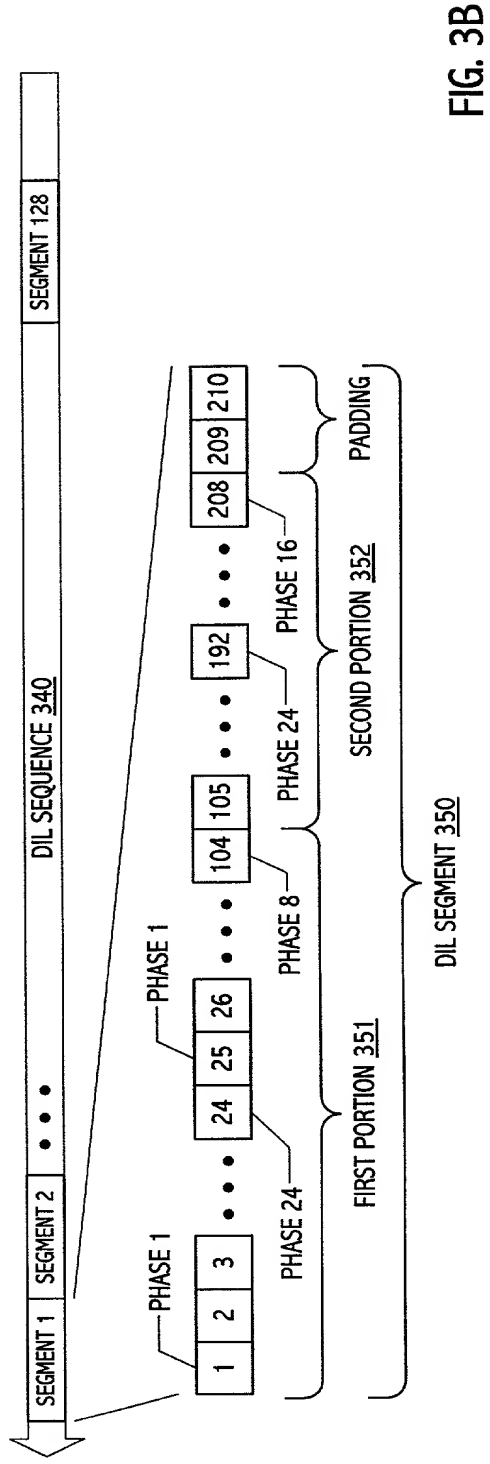
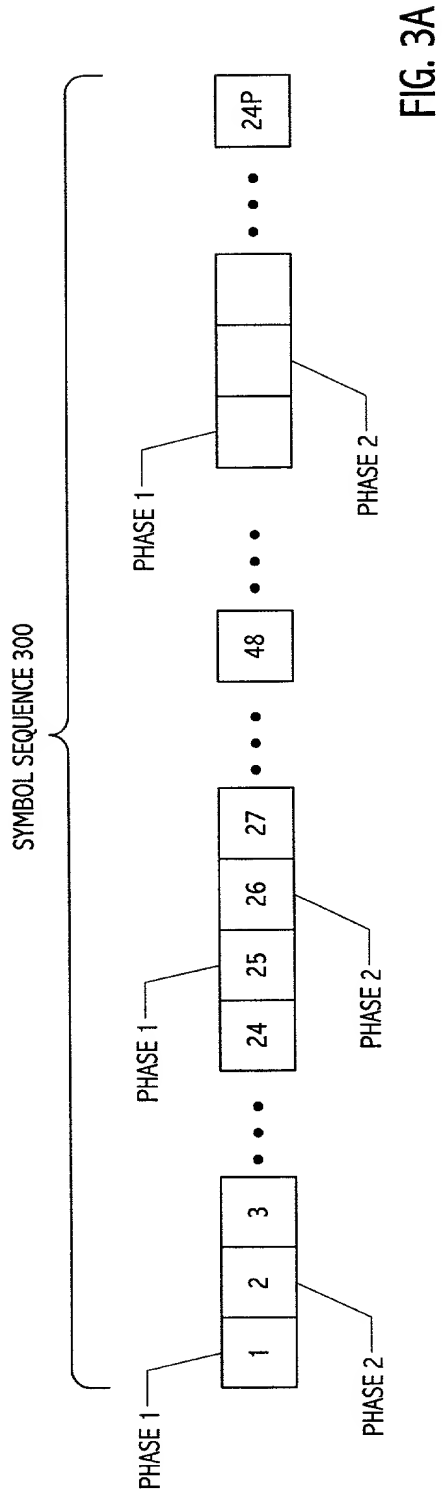


FIG. 2 (PRIOR ART)



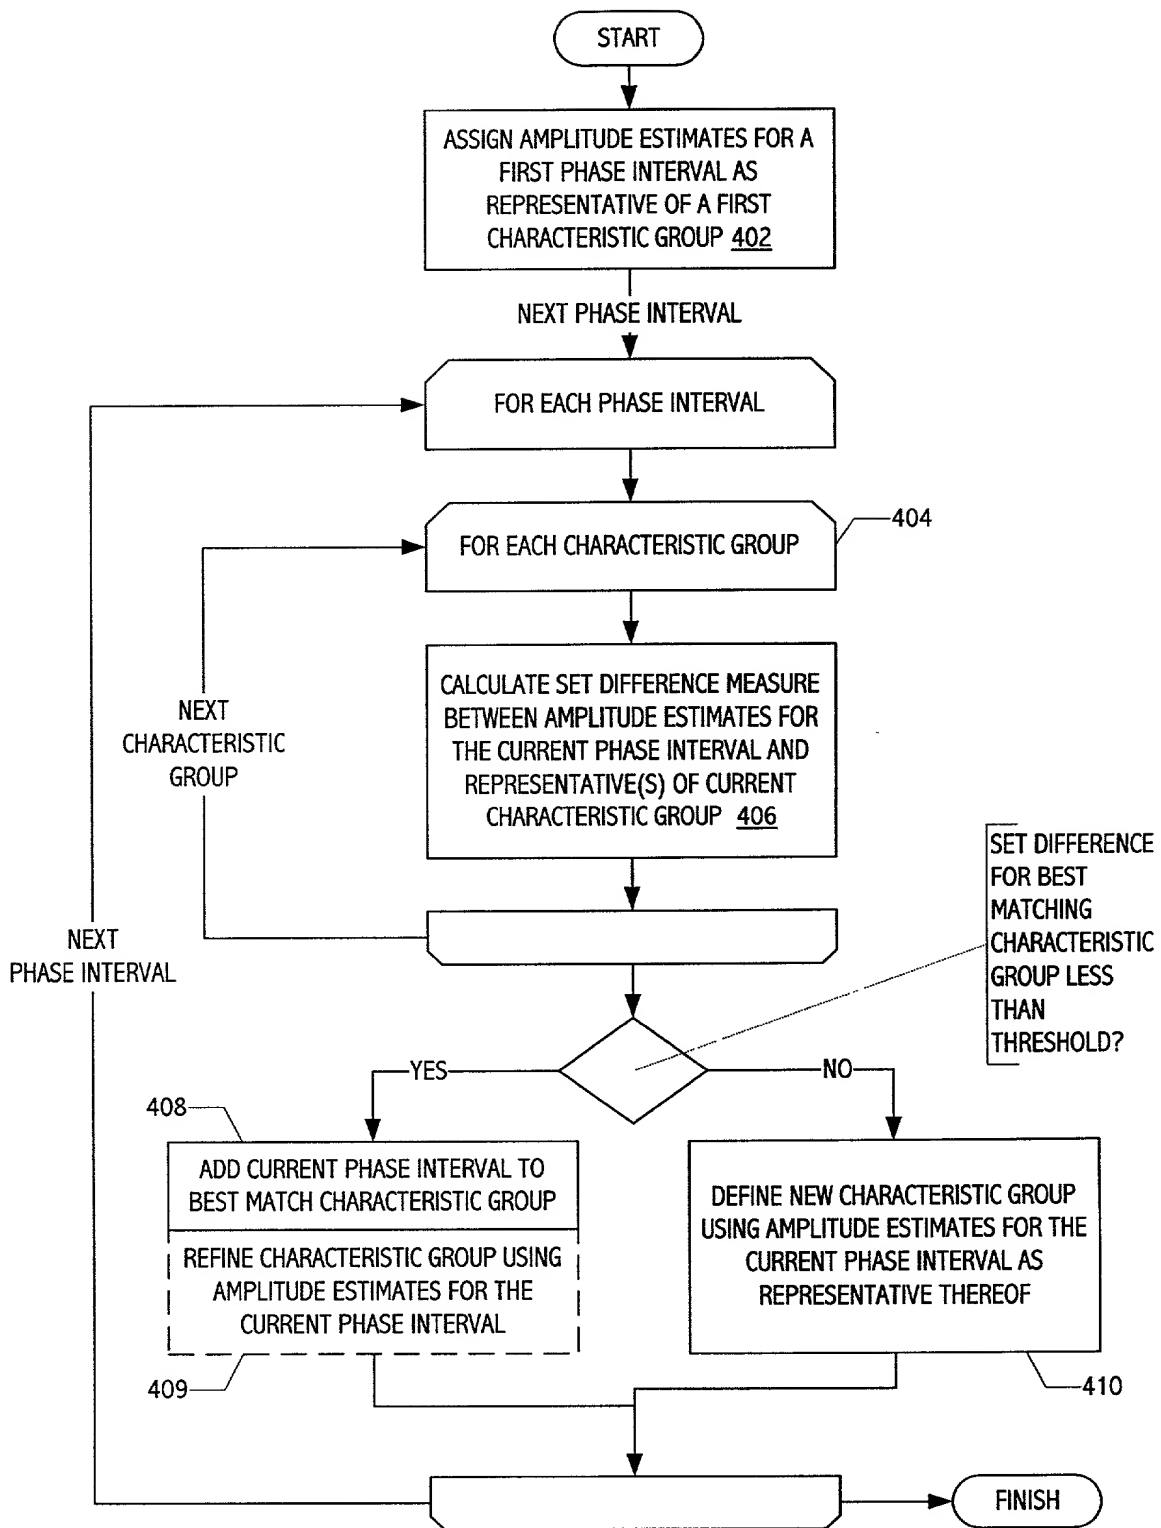


FIG. 4

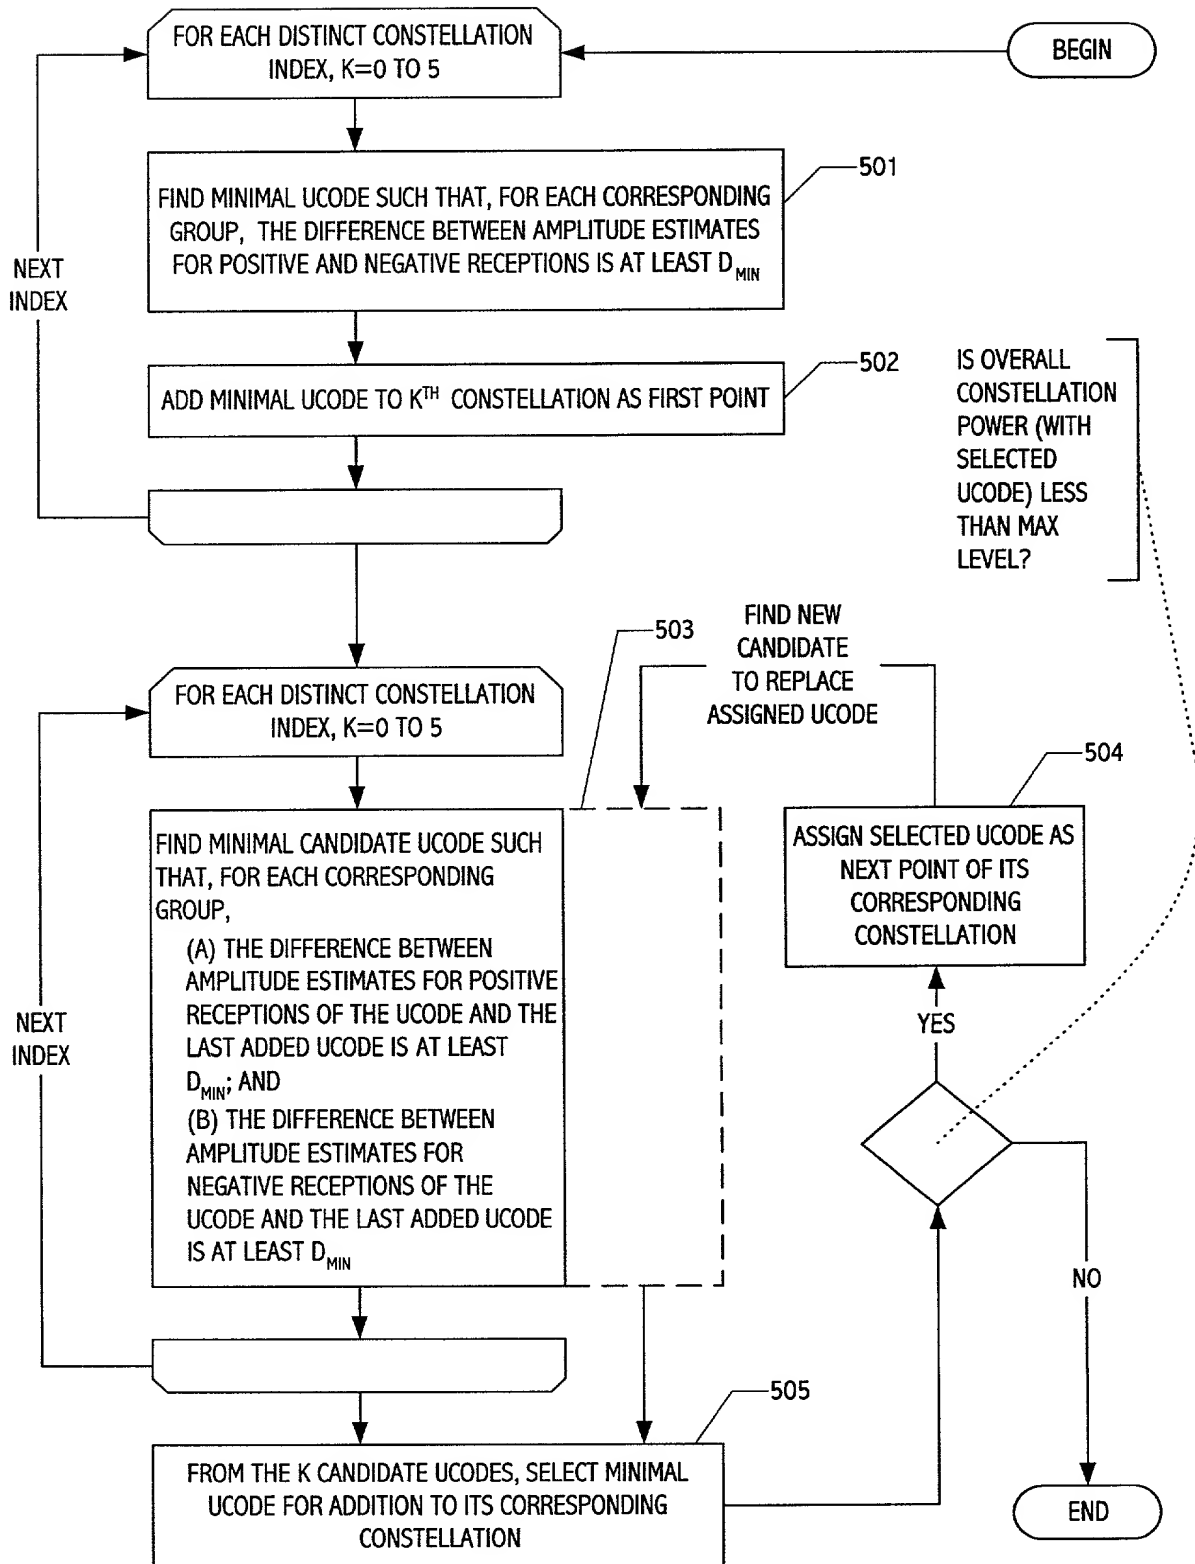


FIG. 5

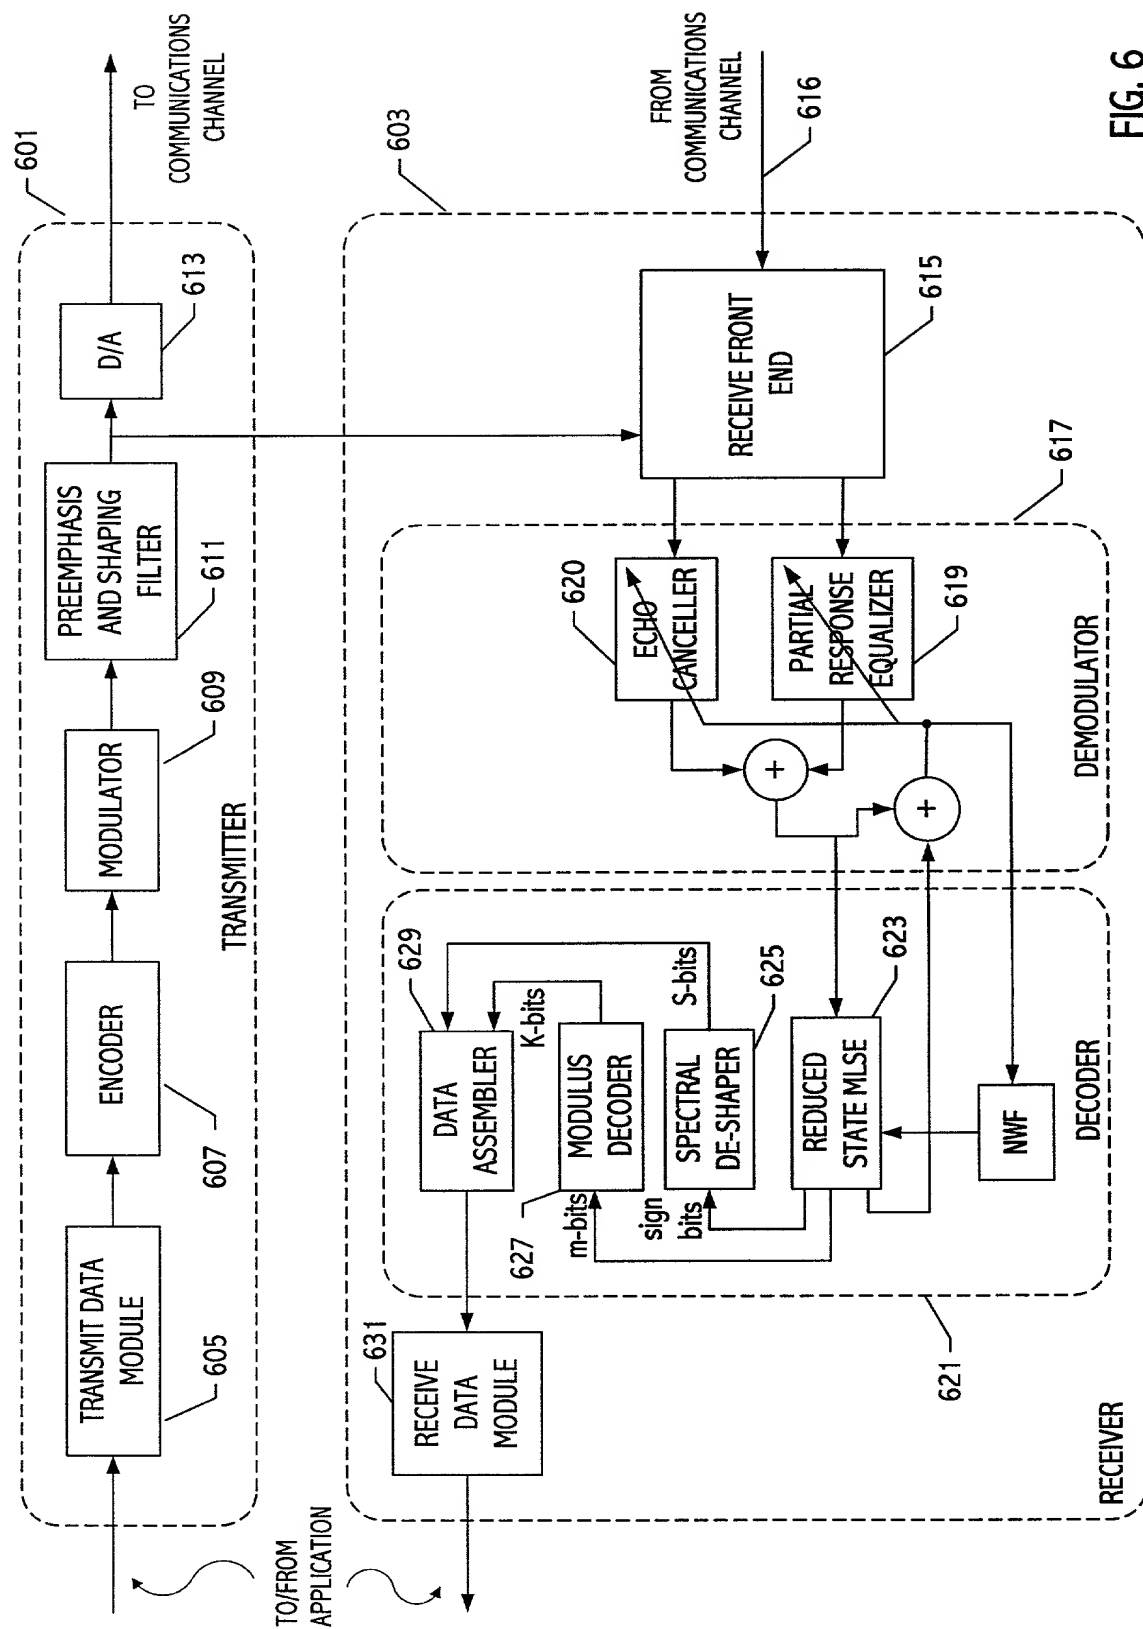


FIG. 6

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter (process, machine, manufacture, or composition of matter, or an improvement thereof) which is claimed and for which a patent is sought by way of the application entitled

### CATEGORIZATION OF IMPAIRMENTS AFFECTING A COMMUNICATION CHANNEL

which (check) ☒ is attached hereto.  
☐ and is amended by the Preliminary Amendment attached hereto.  
☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_  
☐ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
Number	Country	Day/Month/Year Filed	Yes	No
N/A				

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Provisional Application Number	Filing Date
60/146,780	July 31, 1999

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information, which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
N/A		



I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith:

Mark Zagorin (36,067);  
Andrew C. Graham (36,531); and  
David W. O'Brien (40,107).

Please direct all correspondence concerning this application to the USPTO Customer Number, if provided, or otherwise to the individual and/or firm named below:

Customer Number 22120  
**ZAGORIN, O'BRIEN & GRAHAM, L.L.P.**  
401 WEST 15<sup>TH</sup> STREET, SUITE 870  
AUSTIN, TX 78701

Telephone: (512) 347-9030  
Facsimile: (512) 347-9031



I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole (or first joint) inventor: Haixiang Liang

Inventor's Signature: Haixiang Liang

Residence: ~~San Jose, CA~~ Palo Alto, CA

Post Office Address: ~~1430 Johnson Avenue~~  
~~San Jose, CA 95129~~

1403 Pitman Ave  
Palo Alto, CA 94301

Date: 7/28/2000

Citizenship: USA